



LANCASTER

PLAS-TECH® 30°

METRIC


Thread Forming Screws

FOR PLASTICS

T-Drive® (6-Lobe) Flange

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

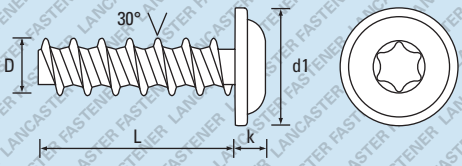

Also available in A2 Stainless Steel - See page 194

Further technical data is available on page 246

| Dia. D | 2.2 | 2.5 | 3 | 3.5 | 4 | 5 | 6 | - | Dia. D |
|--------------|---|-----------------------|-----------------------|-----------------------|-----------------------|----------------------|-------|----|--------------|
| Dia. Gauge | - | - | - | - | - | - | - | - | Dia. Gauge |
| d1 - max | 4.50 | 5.00 | 6.00 | 7.00 | 8.00 | 10.00 | 12.00 | - | d1 - max |
| k | 1.40 | 1.50 | 2.10 | 2.40 | 2.60 | 3.30 | 3.60 | - | k |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | T6 | T6 | T10 | T10 | T20 | T20 | T25 | - | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length mm |
| 5 | | | | | | | | | 5 |
| 6 | 65,000 1,000 0.25 | 45,000 1,000 0.50 | | | | | | | 6 |
| 8 | 50,000 1,000 0.27 | 30,000 1,000 0.60 | 26,000 1,000 0.60 | 20,000 1,000 1.20 | 12,000 1,000 1.60 | | | 8 | |
| 10 | 40,000 1,000 0.34 | 30,000 1,000 0.70 | 21,000 1,000 0.73 | 17,000 1,000 1.40 | 10,000 1,000 1.80 | | | 10 | |
| 12 | | 25,000 1,000 0.80 | 18,000 1,000 0.82 | 15,000 1,000 1.50 | 8,000 1,000 2.00 | 5,500 1,000 3.40 | | | 12 |
| 14 | | 20,000 1,000 0.90 | 16,000 1,000 1.20 | 10,000 1,000 1.60 | 7,500 1,000 2.20 | 5,000 500 3.60 | | | 14 |
| 16 | | 20,000 1,000 1.00 | 14,000 1,000 1.30 | 10,000 1,000 1.70 | 7,000 1,000 2.22 | 4,500 500 3.80 | | | 16 |
| 18 | | 17,000 1,000 1.10 | 12,000 1,000 1.40 | 9,000 1,000 1.90 | 6,000 1,000 2.60 | 4,000 500 4.00 | | | 18 |
| 20 | | 15,000 1,000 1.20 | 11,000 1,000 1.50 | 8,000 1,000 2.10 | 6,000 1,000 2.80 | 4,000 500 4.20 | | | 20 |
| 25 | | 11,000 1,000 1.50 | 8,000 1,000 1.70 | 7,000 1,000 2.30 | 5,000 500 3.00 | 3,000 500 4.70 | | | 25 |
| 30 | | | | 5,000 1,000 2.50 | 4,000 500 3.20 | 2,500 500 5.00 | | | 30 |
| - | | | | | | | | | - |
| - | | | | | | | | | - |
| - | | | | | | | | | - |
| - | | | | | | | | | - |
| - | | | | | | | | | - |

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

| PRODUCT CODE EXAMPLE | PRODUCT DESCRIPTION EXAMPLE |
|----------------------|---|
| PSBPTXFLN30010ZC | 3 x 10 T-Drive® Flange Plas-Tech® 30° Screw Steel / Zinc Plated (CR3) |
| PSBPTXFLN50012ZN | 5 x 12 T-Drive® Flange Plas-Tech® 30° Screw Steel / Black (CR3) |

Plas-Tech® and T-Drive® are registered trade marks of Lancaster Fastener Co Ltd. E. & O. E.
 © 2021, Lancaster Fastener Co Ltd. All images are copyright protected.

Carbon Steel Product Ranges

Stainless Steel Product Ranges

Brass Product Ranges

Technical Data