
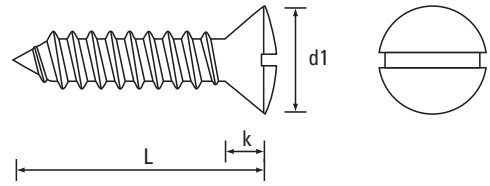


# Self-Tapping Screws

Screws for Sheet Metal Applications

Slotted Raised Countersunk DIN 7973 Type C

Steel / Zinc Plated (CR3)



Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ltabslrdszc>

L - Length mm										L - Length ins
4.5										3/16
6.5										1/4
8										5/16
9.5										3/8
13		●	●				●			1/2
16		●	●		●	●				5/8
19		●	●		●	●				3/4
22										7/8
25		●	●		●	●				1
32			●		●	●				1 1/4
38			●		●	●	●			1 1/2
45										1 3/4
50					●					2
57										2 1/4
63										2 1/2
70										2 3/4
75										3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
LTABSLRSD29250ZC

PRODUCT DESCRIPTION EXAMPLE  
2.9 x 25.0 Slotted Raised Countersunk DIN 7973 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)