




# Self-Tapping Screws

## Slotted Raised Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

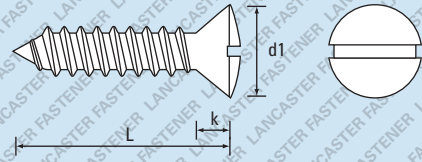

Further technical data is available on pages 234 - 236

### TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess

L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000			L- Length ins
	4.5			
6.5				1/4
8				5/16
9.5	36,000   1,000   0.47			3/8
13	35,000   1,000   0.60	20,000   1,000   0.83		1/2
16	30,000   1,000   0.64	20,000   1,000   1.03	12,000   1,000   1.40	5/8
19	27,000   1,000   0.74	13,000   1,000   1.15	10,000   1,000   1.71	3/4
22				7/8
25	20,000   1,000   1.08	12,000   1,000   1.40	8,500   1,000   2.22	1
32		8,000   1,000   1.77	7,000   500   2.60	1 1/4
38		7,000   1,000   2.05	5,000   500   3.00	1 1/2
45			4,500   500   4.00	1 3/4
50			3,500   500   3.90	2
57				2 1/4
63				2 1/2
70				2 3/4
75				3

Zinc Plated (CR3) - preferred and available from stock.  
Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

#### PRODUCT CODE EXAMPLE

LTABSLRSD29250ZC  
LTABSLRSD48380ZN

#### PRODUCT DESCRIPTION EXAMPLE

2.9 x 25.0 Slotted Raised Countersunk Type C DIN 7973 Self-Tapping Screw Steel / Zinc Plated (CR3)  
4.8 x 38.0 Slotted Raised Countersunk Type C DIN 7973 Self-Tapping Screw Steel / Black (CR3)