


T-Drive® (6-Lobe) Pan

Steel / Zinc Plated (CR3)



Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	-	-	2.55	3.05	3.55	4.06	5.06	-	Dia. C max
d1 - max	-	-	4.00	5.00	6.00	7.00	8.00	-	d1 - max
k - max	-	-	1.60	1.95	2.30	2.45	2.80	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	T6	T8	T10	T15	T20	-	Recess

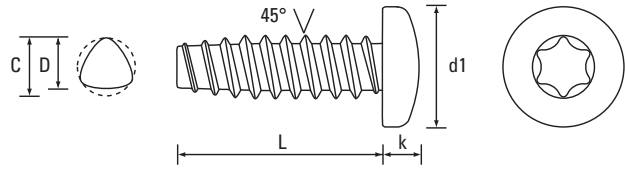

Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-pt45wtxpanzc>

L - Length mm									L - Length mm
4									4
5									5
6			●	●		●			6
8			●	●	●	●			8
10				●	●	●	●		10
12				●	●	●	●		12
16				●	●	●	●		16
20						●	●		20
25					●	●	●		25
30							●		30
35									35
40									40
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
PT45WTXPAN25008ZC

PRODUCT DESCRIPTION EXAMPLE
2.5 x 8 T-Drive® (6-Lobe) Pan Plas-Fix® 45° Screw Steel / Zinc Plated (CR3)