




Self-Tapping Screws

Slotted Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

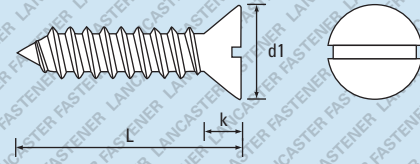

Further technical data is available on pages 234 - 236

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5	40,000 1,000 0.40	28,000 1,000 0.66						3/8	
13	35,000 1,000 0.54	22,000 1,000 0.71	16,000 1,000 1.17					1/2	
16	30,000 1,000 0.60	18,000 1,000 0.92	9,000 1,000 2.00					5/8	
19	25,000 1,000 0.71	16,000 1,000 1.13	16,000 1,000 1.40	12,000 1,000 1.60	8,000 1,000 2.24	3/4			
22									7/8
25	17,000 1,000 0.92	13,000 1,000 1.36	6,000 1,000 2.80					1	
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTABSLCSK48380ZC
 LTABSLCSK35190ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 38.0 Slotted Countersunk Type C DIN 7972 Self-Tapping Screw Steel / Zinc Plated (CR3)
 3.5 x 19.0 Slotted Countersunk Type C DIN 7972 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.

© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.