


# Self-Tapping Screws

## T-Drive® (6-Lobe) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

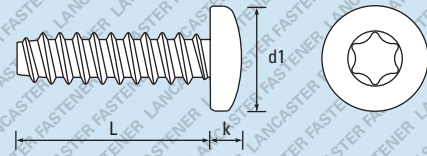

Further technical data is available on pages 234 - 236

### TYPE F blunt

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm	
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge	
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max	
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max	
s - A/F	-	-	-	-	-	-	-	-	s - A/F	
Recess	T8	T10	T15	T15	T20	T25	T25	T30	Recess	
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000							L- Length ins		
4.5								3/16		
6.5	40,000   1,000   0.46	28,000   1,000   0.78			15,000   1,000   1.12				1/4	
8								5/16		
9.5	32,000   1,000   0.55	25,000   1,000   0.91			13,000   1,000   1.33	8,500   1,000   2.12				3/8
13								1/2		
16								5/8		
19								3/4		
22								7/8		
25								1		
32								1 1/4		
38								1 1/2		
45								1 3/4		
50								2		
57								2 1/4		
63								2 1/2		
70								2 3/4		
75								3		

Zinc Plated (CR3) - preferred and available from stock.  
 Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

#### PRODUCT CODE EXAMPLE

LTBTXPAN55130ZC  
 LTBTXPAN48160ZN

#### PRODUCT DESCRIPTION EXAMPLE

5.5 x 13.0 T-Drive® Pan Type F DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)  
 4.8 x 16.0 T-Drive® Pan Type F DIN 7981 Self-Tapping Screw Steel / Black (CR3)

T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd.  
 E. & O. E.  
 © 2021 Lancaster Fastener Co Ltd. All images are copyright protected.