




Self-Tapping Screws

Cross Recess (Z) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

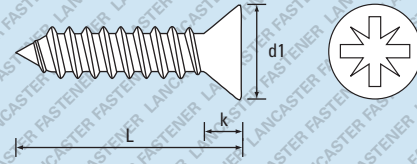

Also available in A2 Stainless Steel - See page 160

Further technical data is available on pages 234 - 236

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess

L- Length mm	Bulk Carton Quantity			Small Box Quantity			Weight (KG) per 1,000			L- Length ins	
	Qty	Weight (KG)	Weight (LBS)	Qty	Weight (KG)	Weight (LBS)	Qty	Weight (KG)	Weight (LBS)		
4.5	145,000	1,000	0.10							3/16	
6.5	120,000	1,000	0.14	65,000	1,000	0.29	42,000	1,000	0.47	1/4	
8	110,000	1,000	0.17	55,000	1,000	0.37	39,000	1,000	0.56	5/16	
9.5	90,000	1,000	0.20	40,000	1,000	0.40	28,000	1,000	0.64	3/8	
13	75,000	1,000	0.27	35,000	1,000	0.51	22,000	1,000	0.81	1/2	
16	45,000	1,000	0.33	30,000	1,000	0.63	18,000	1,000	0.98	5/8	
19				25,000	1,000	0.74	16,000	1,000	1.15	3/4	
22				20,000	1,000	0.85	13,000	1,000	1.33	7/8	
25				17,000	1,000	0.96	13,000	1,000	1.50	1	
32				15,000	1,000	1.18	10,000	1,000	1.84	1 1/4	
38					7,500	1,000	2.18	7,500	500	2.41	1 1/2
45					5,500	500	2.52	4,000	500	3.79	1 3/4
50					3,500	500	2.86	5,000	500	3.18	2
57								2,700	250	4.30	2 1/4
63								2,300	250	4.63	2 1/2
70								1,500	250	4.88	2 3/4
75								1,500	200	8.17	3

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock. See page 287 for further detail.

PRODUCT CODE EXAMPLE	PRODUCT DESCRIPTION EXAMPLE
LTABZCSK48160ZC	4.8 x 16.0 Cross Recess (Z) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)
LTABZCSK29130ZN	2.9 x 13.0 Cross Recess (Z) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Black (CR3)