



PROTECTOR

TAMPER PROOF

Self-Tapping Screws



Also available in A2 Stainless Steel - See page 182




PROTECTOR 4

Pin T-Drive® (6-Lobe) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

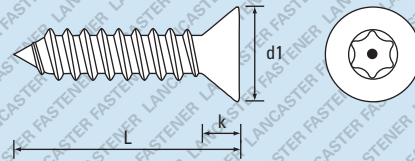

Further technical data is available on page 244

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T8	T10	T15	T20	T25	T25	T30	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins	
4.5								3/16	
6.5								1/4	
8								5/16	
9.5								3/8	
13					16,000 1,000 1.12			1/2	
16	18,000 1,000 0.91				12,000 1,000 1.55			5/8	
19					12,000 1,000 1.50			3/4	
22								7/8	
25					9,000 1,000 2.00			1	
32								1 1/4	
38								1 1/2	
45								1 3/4	
50								2	
57								2 1/4	
63								2 1/2	
70								2 3/4	
75								3	

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTABPNDRCSK48160ZC
LTABPNDRCSK35380ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 16.0 Pin T-Drive® Countersunk PROTECTOR 4 Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 38.0 Pin T-Drive® Countersunk PROTECTOR 4 Type C DIN 7982 Self-Tapping Screw Steel / (CR3)

T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd.
E. & O. E.
© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.