



ROLLED THREAD


# Machine Screws

GRADE 4.8

## Cross Recess (H) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

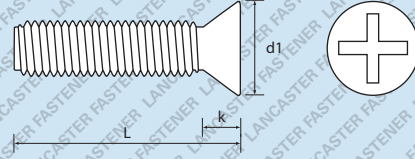

Further technical data is available on page 241

Thread	M1.6	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Thread
Dia. Gauge	-	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	3.00	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	0.96	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	2	2	2	3	4	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000									L- Length mm
3										3
4										4
5										5
6										6
8										8
10										10
12										12
16										16
20										20
25										25
30										30
35										35
40										40
45										45
50										50
55										55
60										60
70										70
80										80
90										90
100										100

Zinc Plated (CR3) - preferred and available from stock.  
Black (CR3) - non preferred and subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

MSMHCSK40016ZC  
MSMHCSK30012ZN

PRODUCT DESCRIPTION EXAMPLE

M4 x 16 Cross Recess (H) Countersunk DIN 965 Machine Screw Grade 4.8 Steel / Zinc Plated (CR3)  
M3 x 12 Cross Recess (Z) Countersunk DIN 965 Machine Screw Grade 4.8 Steel / Black (CR3)

180° & 360° NYLOK® Blue Patching service available on M2 dia. and above.

See page 267 for further detail.

NYLOK® is a registered trade mark of NYLOK®.