




Self-Tapping Screws

Washer Hexagon

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

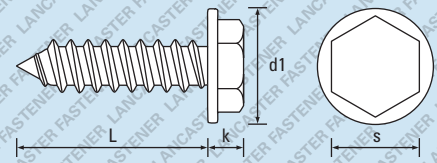

Further technical data is available on pages 234 - 236

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.5	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	6	8	10	12	14	Dia. Gauge
d1 - max	-	-	8.30	-	8.80	10.50	11.00	13.50	d1 - max
k - max	-	-	3.40	-	4.10	4.30	5.40	5.90	k - max
s - A/F max.	-	-	5.50	1/4"	7.00	8.00	8.00	10.00	s - A/F max.
Recess	-	-	-	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5				18,000 1,000 1.10	11,000 1,000 1.68				3/8
13				15,000 1,000 1.19	10,000 1,000 1.81	7,500 1,000 2.62	6,000 1,000 3.35	3,800 500 5.05	1/2
16					8,000 1,000 2.20	6,500 1,000 2.90	5,000 1,000 3.61	3,500 500 5.73	5/8
19				12,000 1,000 1.40	7,000 1,000 2.25	6,000 1,000 3.02	4,000 500 3.97	3,000 500 6.30	3/4
22									7/8
25					6,000 1,000 2.81	4,000 500 3.86	4,000 500 4.66	2,600 250 7.50	1
32								2,500 250 8.00	1 1/4
38								1,700 250 9.40	1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267
 for further detail.

PRODUCT CODE EXAMPLE

LTABWHX55160ZC
 LTABWHX63130ZN

PRODUCT DESCRIPTION EXAMPLE

5.5 x 16.0 Washer Hexagon Type C DIN 6928 Self-Tapping Screw Steel / Zinc Plated (CR3)
 6.3 x 13.0 Washer Hexagon Type C DIN 6928 Self-Tapping Screw Steel / Black (CR3)