


TAP-FIX®

Thread Rolling Screws

FOR METAL

Cross Recess (Z) Countersunk
A2 Stainless Steel

RoHS 2 Compliant

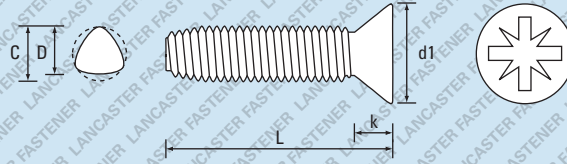

Also available in Steel / Zinc Plated - See page 72

Further technical data is available on page 239

FORM M DIN 965

Dia. D _{max}	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D _{max}
Dia. C _{max}	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C _{max}
d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	1	2	2	2	3	4	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length mm
4									4
5									5
6									6
7									7
8									8
10									10
12									12
14									14
16									16
18									18
20									20
25									25
30									30
35									35
40									40
45									45
50									50

 A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE

SSTTMWZCSK50010A2

PRODUCT DESCRIPTION EXAMPLE

M5 x 10 Cross Recess (Z) Countersunk DIN 7500 FORM M Tap-Fix® Screw A2 Stainless Steel

 Tap-Fix® is a registered trade mark of Lancaster Fastener Co Ltd.
 E. & O. E.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.