


DIN 7500 Tap-Fix® Screws

Thread Rolling Screws for Metal Applications

T-Drive® (6-Lobe) Countersunk FORM M DIN 965

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

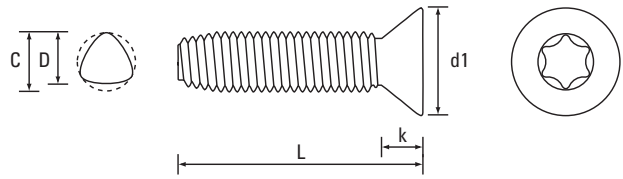

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T10	T15	T20	T25	T30	T40	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ttmwtxcskzc>

L - Length mm	Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ttmwtxcskzc									L - Length mm
4			●							4
5			●							5
6	●	●	● ●		●					6
8		●	● ●		● ●	● ●				8
10		●	● ●		● ●	● ●	●			10
12			● ●		● ●	●	●			12
14										14
16					●	●	● ●	●		16
18										18
20					●	●	● ●	●		20
25			● ●		●	●	●	●		25
30			●		●	●	●	●		30
35					●					35
40							●	●		40
45										45
50							●	●		50
-										-



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

TTMWTXCSK60012ZC
 TTMWTXCSK40012ZN

PRODUCT DESCRIPTION EXAMPLE

M6 x 12 T-Drive® (6-Lobe) Countersunk DIN 7500 FORM M Tap-Fix® Screw Steel / Zinc Plated (CR3)
 M4 x 12 T-Drive® (6-Lobe) Countersunk DIN 7500 FORM M Tap-Fix® Screw Steel / Black (CR3)