


Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Countersunk DIN 7982 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

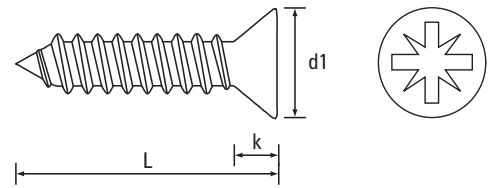

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabzcskzc								L - Length ins
4.5	●								3/16
6.5	●	●	●						1/4
8	●	●	●						5/16
9.5	●	●	● ●	●	● ●				3/8
13	●	●	● ●	● ●	● ●	● ●	●		1/2
16	●	●	● ●	● ●	● ●	● ●	●	●	5/8
19		●	● ●	●	● ●	● ●	●	● ●	3/4
22		●	●	●	● ●	●			7/8
25		●	● ●	●	● ●	● ●	●	● ●	1
32		●	● ●	●	● ●	● ●	●	●	1 1/4
38			● ●	●	● ●	● ●	●	●	1 1/2
45			●		● ●	● ●	●	●	1 3/4
50			●	●	● ●	● ●	●	●	2
57					●	●			2 1/4
63					●	●	●	●	2 1/2
70					●				2 3/4
75						●		●	3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTABZCSK48160ZC
 LTABZCSK35250ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 16.0 Cross Recess (Z) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)
 3.5 x 25.0 Cross Recess (Z) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Black (CR3)