




INCH Thread Rolling Screws FOR PLASTICS

Cross Recess (Z) Flange Steel / Zinc Plated (CR3) & Steel / Black (CR3) RoHS 2 Compliant

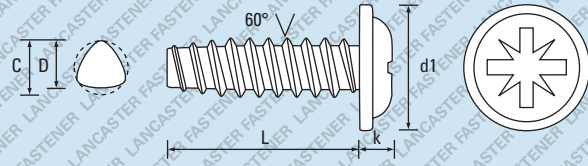

Further technical data is available on page 248

Table with 10 columns: Dia. Gauge, 2.28, 4.20, 6.19, 8.16, 10.14, -, -, -, Dia. Gauge; Dia. D max, 0.089, 0.123, 0.143, 0.179, 0.208, -, -, -; Dia. C max, 0.092, 0.127, 0.147, 0.185, 0.212, -, -, -; d1 - max ins, 0.194, 0.257, 0.321, 0.384, 0.448, -, -, -; k - max ins, 0.059, 0.063, 0.074, 0.093, 0.114, -, -, -; Recess, 1, 1, 2, 2, 2, -, -, -; L- Length ins, Bulk Carton Quantity, Small Box Quantity, Weight (KG) per 1,000, L- Length ins

Main table with columns for L- Length ins and Bulk Carton Quantity | Small Box Quantity | Weight (KG) per 1,000. Rows include lengths: 3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 3/4, 1, 1 1/4, 1 3/8, -, -, -, -.

Zinc Plated (CR3) - preferred and available from stock. Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

Table with 2 columns: PRODUCT CODE EXAMPLE, PRODUCT DESCRIPTION EXAMPLE. Rows: PTWZFLN35095ZC 6.19 x 3/8 Cross Recess (Z) Flange Plas-Fix® 60° Screw Steel / Zinc Plated (CR3); PTWZFLN42095ZN 8.16 x 3/8 Cross Recess (Z) Flange Plas-Fix® 60° Screw Steel / Black (CR3)

Plas-Fix® is a registered trade mark of Lancaster Fastener Co Ltd. E. & O. E. © 2021, Lancaster Fastener Co Ltd. All images are copyright protected.