


Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Raised Countersunk DIN 7983 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

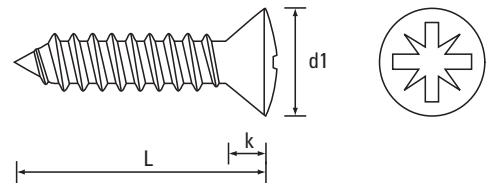

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabzrsdzc								L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5		●	●						3/8
13		●	● ●	●	● ●	●			1/2
16		●	● ●	●	● ●	●			5/8
19		●	● ●	●	● ●	●	●		3/4
22			●	●	●				7/8
25		●	● ●	●	● ●	●			1
32			● ●	●	●	● ●	●		1 1/4
38			●		●	●	●		1 1/2
45					● ●				1 3/4
50					●	●	●		2
57									2 1/4
63									2 1/2
70									2 3/4
75									3



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTABZRS55190ZC
LTABZRS35320ZN

PRODUCT DESCRIPTION EXAMPLE

5.5 x 19.0 Cross Recess (Z) Raised Countersunk DIN 7983 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 32.0 Cross Recess (Z) Raised Countersunk DIN 7983 Type C Self-Tapping Screw Steel / Black (CR3)