


# DIN 7500 Tap-Fix® Screws

Thread Rolling Screws for Metal Applications

T-Drive® (6-Lobe) Countersunk FORM M DIN 965

A2 Stainless Steel

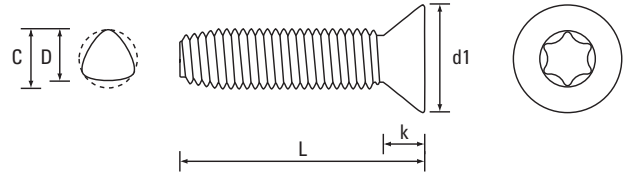

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T10	T15	T20	T25	T30	T40	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ssttmwtxcska2>

L - Length mm									L - Length mm
4									4
5									5
6			●		●				6
8			●		●	●	●		8
10			●		●	●	●		10
12			●		●	●	●		12
14									14
16					●	●	●		16
18									18
20			●		●	●	●		20
25			●		●	●	●		25
30							●		30
35							●		35
40							●		40
45									45
50									50
-									-

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE  
 SSTTMWTXCSK30025A2

PRODUCT DESCRIPTION EXAMPLE  
 M3 x 25 T-Drive® (6-Lobe) Countersunk DIN 7500 FORM M Tap-Fix® Screw A2 Stainless Steel