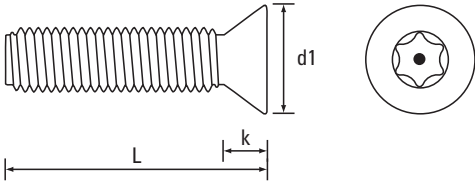


Machine Screws - Grade 4.8

Screws for Metal Applications

Pin T-Drive® (6-Lobe) Countersunk DIN 965 SIMILAR

Steel / Zinc Plated (CR3)

Thread	M1.6	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Thread
Dia. Gauge	-	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	3.00	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	0.96	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	-	s - A/F
Recess	T5	T6	T8	T10	T15	T20	T25	T30	T40	Recess

L - Length mm



Scan the QR Code to view techincal drawings for this product range
<https://www.lancasterfastener.com/drawings-for-msmpndrcskzc>

L - Length mm

3										3
4										4
5										5
6										6
8										8
10										10
12										12
14										14
16							●			16
18										18
20						●		●		20
22										22
25										25
30						●				30
35										35
40										40
45										45
50										50
55										55
60										60
70										70
80										80
90										90
100										100

●

Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

MSMPNDRCSK50020ZC

PRODUCT DESCRIPTION EXAMPLE

M5 x 20 Pin T-Drive® (6-Lobe) Countersunk DIN 965 SIMILAR Machine Screw Grade 4.8 Steel / Zinc Plated (CR3)