




Self-Tapping Screws

Cross Recess (Z) Raised Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

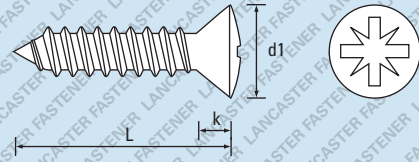

Further technical data is available on pages 234 - 236

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5	40,000 1,000 0.46	32,000 1,000 0.76							3/8
13	35,000 1,000 0.58	20,000 1,000 0.93	18,000 1,000 1.11	14,000 1,000 1.44	9,500 1,000 1.64			1/2	
16	30,000 1,000 0.69	20,000 1,000 1.10	15,000 1,000 1.30	12,000 1,000 1.69	9,000 1,000 2.30			5/8	
19	27,000 1,000 0.80	13,000 1,000 1.27	12,000 1,000 1.49	10,000 1,000 1.95	7,000 1,000 2.62	5,000 1,000 3.63		3/4	
22		13,000 1,000 1.44	10,000 1,000 1.63	10,000 1,000 2.20	7,000 1,000 2.94			7/8	
25	20,000 1,000 1.03	12,000 1,000 1.61	10,000 1,000 1.87	8,500 1,000 2.45	6,300 1,000 3.27			1	
32		8,000 1,000 1.95	6,500 1,000 2.25	7,000 500 2.96	5,000 500 3.92	4,000 500 5.39		1 1/4	
38		7,000 1,000 2.30		5,000 500 3.47	4,500 500 4.57	3,000 500 6.27		1 1/2	
45				5,000 500 3.87	3,500 500 5.23			1 3/4	
50				3,500 500 3.98	2,500 250 5.55	2,400 250 7.28		2	
57								2 1/4	
63								2 1/2	
70								2 3/4	
75								3	

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

LTABZRSD55190ZC
LTABZRSD35320ZN

PRODUCT DESCRIPTION EXAMPLE

5.5 x 19.0 Cross Recess (Z) Raised Countersunk Type C DIN 7983 Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 32.0 Cross Recess (Z) Raised Countersunk Type C DIN 7983 Self-Tapping Screw Steel / Black (CR3)