


T-Drive® (6-Lobe) Flange

Steel / Zinc Plated (CR3) & Steel / Black (CR3)



Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.50	5.00	6.00	7.00	8.00	10.00	12.00	d1 - max
k	-	1.40	1.50	2.10	2.40	2.60	3.30	3.60	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T6	T6	T10	T10	T20	T20	T25	Recess

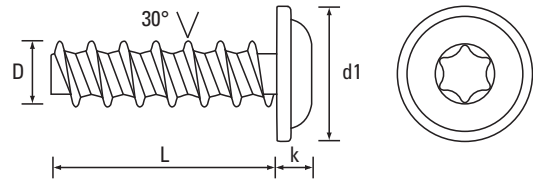

Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-psbptxfnlzc>

L - Length mm	Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-psbptxfnlzc									L - Length mm
5										5
6			●	● ●						6
8			●	● ●	●	● ●	●			8
10			●	● ●	● ●	● ●	● ●			10
12				● ●	● ●	● ●	● ●	●		12
14				● ●	●	●	● ●	● ●	● ●	14
16				●	● ●	● ●	● ●	● ●	● ●	16
18				●	●	●	●	● ●	● ●	18
20				● ●	●	● ●	● ●	● ●	● ●	20
25				●	●	● ●	● ●	●		25
30						●	● ●	●		30
35										35
40										40
-										-
-										-
-										-
-										-

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

PSBPTXFLN30010ZC
 PSBPTXFLN50012ZN

PRODUCT DESCRIPTION EXAMPLE

3 x 10 T-Drive® (6-Lobe) Flange Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
 5 x 12 T-Drive® (6-Lobe) Flange Plas-Tech® 30° Screw Steel / Black (CR3)