


T-Drive® (6-Lobe) Countersunk

A2 Stainless Steel



Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	3.80	4.70	5.50	7.30	8.40	9.30	11.30	d1 - max
k - ref	-	1.30	1.75	2.05	2.80	3.25	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T6	T8	T8	T15	T20	T20	T30	Recess

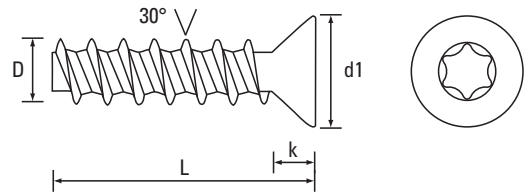

Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-sspsbptxcska2>

L - Length mm									L - Length mm
5									5
6				●					6
8				●	●				8
10				●	●	●	●		10
12				●	●	●	●		12
14									14
16				●	●	●	●		16
18									18
20						●	●		20
25							●		25
30							●		30
35									35
40									40
-									-
-									-
-									-
-									-

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
 SSPSBPTXCSK40010A2

PRODUCT DESCRIPTION EXAMPLE
 4 x 10 T-Drive® (6-Lobe) Countersunk Plas-Tech® 30° Screw A2 Stainless Steel