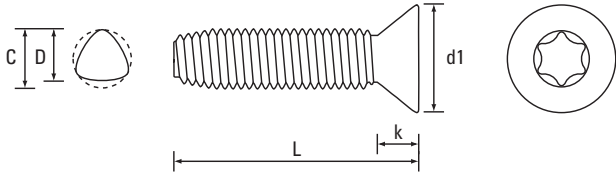


DIN 7500 Tap-Fix® Screws

Thread Rolling Screws for Metal Applications

T-Drive® (6-Lobe) Countersunk FORM M DIN 965

A2 Stainless Steel

| Dia. D     | M2   | M2.5 | M3   | M3.5 | M4   | M5   | M6    | M8    | Dia. D     |
|------------|------|------|------|------|------|------|-------|-------|------------|
| Dia. C max | 2.06 | 2.57 | 3.07 | 3.58 | 4.08 | 5.09 | 6.10  | 8.13  | Dia. C max |
| d1 - max   | 3.80 | 4.70 | 5.60 | 6.50 | 7.50 | 9.20 | 11.00 | 14.50 | d1 - max   |
| k - ref    | 1.20 | 1.50 | 1.65 | 1.93 | 2.20 | 2.50 | 3.00  | 4.00  | k - ref    |
| s - A/F    | -    | -    | -    | -    | -    | -    | -     | -     | s - A/F    |
| Recess     | T6   | T8   | T10  | T15  | T20  | T25  | T30   | T40   | Recess     |

L - Length mm



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ssttmwtxcska2>

L - Length mm

|    |  |  |   |  |   |   |   |  |    |
|----|--|--|---|--|---|---|---|--|----|
| 4  |  |  |   |  |   |   |   |  | 4  |
| 5  |  |  |   |  |   |   |   |  | 5  |
| 6  |  |  | ● |  | ● |   |   |  | 6  |
| 8  |  |  | ● |  | ● | ● | ● |  | 8  |
| 10 |  |  |   |  | ● | ● | ● |  | 10 |
| 12 |  |  | ● |  | ● | ● | ● |  | 12 |
| 14 |  |  |   |  |   |   |   |  | 14 |
| 16 |  |  |   |  | ● | ● | ● |  | 16 |
| 18 |  |  |   |  |   |   |   |  | 18 |
| 20 |  |  | ● |  | ● | ● | ● |  | 20 |
| 25 |  |  | ● |  | ● | ● | ● |  | 25 |
| 30 |  |  |   |  |   |   | ● |  | 30 |
| 35 |  |  |   |  |   |   | ● |  | 35 |
| 40 |  |  |   |  |   |   | ● |  | 40 |
| 45 |  |  |   |  |   |   |   |  | 45 |
| 50 |  |  |   |  |   |   |   |  | 50 |
| -  |  |  |   |  |   |   |   |  | -  |

●

A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE

SSTTMWTXCSK30025A2

PRODUCT DESCRIPTION EXAMPLE

M3 x 25 T-Drive® (6-Lobe) Countersunk DIN 7500 FORM M Tap-Fix® Screw A2 Stainless Steel