



LANCASTER

PLAS-FIX® 45°

METRIC


# Thread Rolling Screws

FOR PLASTICS

T-Drive® (6-Lobe) Pan

A2 Stainless Steel

RoHS 2 Compliant

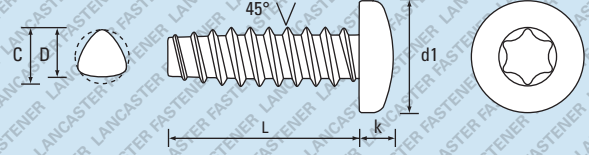

Also available in Steel / Zinc Plated - See page 115

Further technical data is available on page 247

Dia. D max	-	-	2.5	3	3.5	4	5	-	Dia. D max
Dia. C max	-	-	2.55	3.05	3.55	4.06	5.06	-	Dia. C max
d1 - max	-	-	4.00	5.00	6.00	7.00	8.00	-	d1 - max
k - max	-	-	1.60	1.95	2.30	2.45	2.80	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	T6	T8	T10	T15	T20	-	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length mm
4									4
5									5
6			55,000   1,000   0.37	35,000   1,000   0.53	25,000   1,000   0.79				6
7									7
8			45,000   1,000   0.42	28,000   1,000   0.60	22,000   1,000   0.91				8
10			42,000   1,000   0.48	25,000   1,000   0.68	20,000   1,000   1.10				10
12			35,000   1,000   0.56	20,000   1,000   0.75	18,000   1,000   1.12				12
16			25,000   1,000   0.70	18,000   1,000   0.90	15,000   1,000   1.34				16
20			19,000   1,000   0.83	13,000   1,000   1.10	11,000   1,000   1.60				20
25									25
30									30
35									35
-									-
-									-
-									-
-									-
-									-

A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE

SSPT45WTPAN40006A2

PRODUCT DESCRIPTION EXAMPLE

4 x 6 T-Drive® Pan Plas-Fix® 45° Screw A2 Stainless Steel

Plas-Fix® and T-Drive® are registered trade marks of Lancaster Fastener Co Ltd.

E. & O. E.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.