



T-Drive® (6-Lobe) Pan FORM PE ISO 14583

Steel / Zinc Plated (CR3)

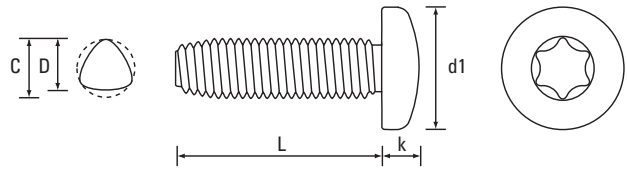

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	4.00	5.00	5.60	7.00	8.00	9.50	12.00	16.00	d1 - max
k - max	1.60	2.10	2.40	2.60	3.10	3.70	4.60	6.00	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T10	T15	T20	T25	T30	T45	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ttiwtspanzc>

L - Length mm									L - Length mm
4									4
5			●		●				5
6			●		●	●			6
8			●		●	●	●		8
10			●		●	●	●		10
12			●		●	●	●		12
14					●				14
16			●		●	●	●		16
18									18
20			●		●	●	●		20
25			●		●	●	●		25
30			●		●	●	●		30
35						●	●		35
40					●	●	●		40
45									45
50									50
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
TTIWTXPAN40020ZC

PRODUCT DESCRIPTION EXAMPLE
M4 x 20 T-Drive® (6-Lobe) Pan DIN 7500 FORM PE ISO 14583 Tap-Fix® Screw Steel / Zinc Plated (CR3)