



LANCASTER

DIN7500

TAP-FIX®


T-Drive® (6-Lobe) Socket Cap

Thread Rolling Screws

Steel / Zinc Plated (CR3) & Lubricated

FOR METAL

RoHS 2 Compliant

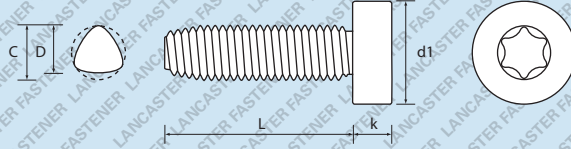

All images are copyright protected

Further technical data is available on page 190

FORM E SIMILAR

Dia. D max	M4	M5	M6	M8	M10	-	-	-	Dia. D max
Dia. C max	4.08	5.09	6.10	8.13	10.15	-	-	-	Dia. C max
d1 - max	7.00	8.50	10.00	13.00	16.00	-	-	-	d1 - max
k - max	4.00	5.00	6.00	8.00	10.00	-	-	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T20	T25	T30	T40	T50	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length mm
5									5
6									6
7									7
8									8
10	12,500 1,000 1.60								10
12	11,000 1,000 1.73		4,000 500 4.78						12
16	10,000 1,000 2.04		3,500 500 5.41						16
20	8,500 1,000 2.34		3,000 500 6.09						20
25		4,000 500 4.69	3,000 500 6.90						25
30			2,500 250 7.70						30
-									-
-									-
-									-
-									-
-									-
-									-

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ.

See Page 219 for further details.

PRODUCT CODE EXAMPLE

PRODUCT DESCRIPTION EXAMPLE

TTMWTXSCKCAP50025ZC

M5 x 25 T-Drive® Socket Cap DIN 7500 FORM E Similar Tap-Fix® Screw Steel / Zinc Plated (CR3)

Tap-Fix® and T-Drive® are registered trade marks of Lancaster Fastener Co Ltd & O. E.

© 2018, Lancaster Fastener Co Ltd.

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com

47

SELF-TAPPING SCREWS

SELF-DRILLING SCREWS

TAP-FIX® THREAD ROLLING SCREWS

ROLLED THREAD MACHINE SCREWS

TAMPER PROOF SECURITY SCREWS

HAMMER DRIVE SCREWS

SCREWS FOR PLASTICS

MICRO DIAMETER SCREWS

K-SERIES® SETZMUTTERN

RIVET BUSHES & SELF-CLIMBING FASTENERS

CD WELD STUDS

BRASS INSERTS FOR PLASTICS

TECHNICAL DATA