


Self-Drilling Screws

T-Drive® (6-Lobe) Countersunk
Steel / Zinc Plated (CR3) & Steel / Black (CR3)
 RoHS 2 Compliant

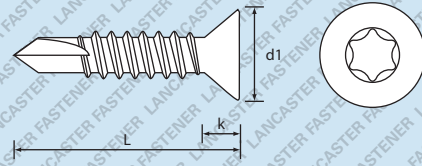

Further technical data is available on page 237

FORM P SIMILAR

Dia. mm	2.9	3.5	3.9	4.2	4.8	5.5	6.3	-	Dia. mm
Dia. Gauge	4	6	7	8	10	12	14	-	Dia. Gauge
d1 - max	5.50	6.80	7.50	8.10	9.50	10.80	12.40	-	d1 - max
k - max	1.70	2.10	2.30	2.50	3.00	3.40	3.80	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T10	T15	T15	T20	T25	T27	T30	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins	
9.5									3/8
13									1/2
16				15,000 1,000 1.28					5/8
19			14,000 1,000 1.27	13,000 1,000 1.44					3/4
22									7/8
25			10,000 1,000 1.65	10,000 1,000 1.88	7,000 1,000 2.49				1
32			8,000 1,000 2.00	7,500 1,000 2.35	5,000 500 3.12				1 1/4
38				5,000 500 2.70	4,000 500 3.69		2,500 250 6.66		1 1/2
45					3,500 500 4.71				1 3/4
50					3,000 250 4.79		1,500 250 8.77		2
60							1,500 125 10.39		2 1/2
70									2 3/4
75									3
80									3 1/4
90									3 1/2
100									4

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

PRODUCT CODE EXAMPLE

DFDPTXCSK39190ZC
 DFDPTXCSK48500ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 19.0 T-Drive® Countersunk DIN 7504 FORM P Similar Self-Drilling Screw Steel / Zinc Plated (CR3)
 5.5 x 32.0 T-Drive® Countersunk DIN 7504 FORM P Similar Self-Drilling Screw Steel / Black (CR3)

T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd.
 E. & O. E.
 © 2021, Lancaster Fastener Co Ltd. All images are copyright protected.