
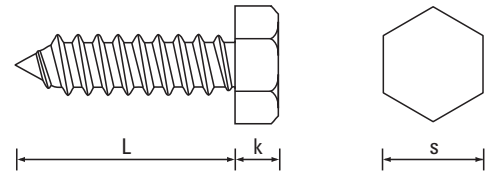



Self-Tapping Screws

Screws for Sheet Metal Applications

Hexagon DIN 7976 Type C

Steel / Zinc Plated (CR3)



Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	-	-	-	-	-	-	d1 - max
k - nom	1.30	1.50	2.30	2.30	2.80	3.00	4.00	4.80	k - nom
s - A/F max	3.20	5.00	5.50	7.00	7.00	8.00	8.00	10.00	s - A/F max
Recess	-	-	-	-	-	-	-	-	Recess
L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabhexzc</p>								L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5			●		●	●			3/8
13			●		●	●	●	●	1/2
16					●	●	●	●	5/8
19			●		●	●	●	●	3/4
22									7/8
25					●	●	●	●	1
32						●	●	●	1 1/4
38						●	●	●	1 1/2
45								●	1 3/4
50							●	●	2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
LTABHEX63190ZC

PRODUCT DESCRIPTION EXAMPLE
6.3 x 19.0 Hexagon DIN 7976 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)

Screws for Plastics
ISO & DIN 7500 Tap-Fix® Screws
Machine Screws
Self-Tapping Screws
Self-Drilling Screws
Micro Diameter Screws
Hammer Drive Screws
K-Series® Setzmuttern
Rivet Bushes
Self-Clinching Fasteners
CD Weld Studs
Brass Inserts for Plastics