


Cross Recess (Z) Flange

Steel / Zinc Plated (CR3)



| Dia. Gauge | 2.28 | 4.20 | 6.19 | 8.16 | 10.14 | - | - | - | Dia. Gauge |
|--------------|-------|-------|-------|-------|-------|---|---|---|--------------|
| Dia. D max | 0.089 | 0.123 | 0.143 | 0.179 | 0.208 | - | - | - | Dia. D max |
| Dia. C max | 0.092 | 0.127 | 0.147 | 0.185 | 0.212 | - | - | - | Dia. C max |
| d1 - max ins | 0.194 | 0.257 | 0.321 | 0.384 | 0.448 | - | - | - | d1 - max ins |
| k - max ins | 0.059 | 0.063 | 0.074 | 0.093 | 0.114 | - | - | - | k - max ins |
| Recess | 1 | 1 | 2 | 2 | 2 | - | - | - | Recess |

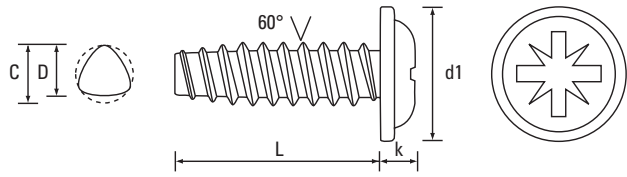

Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ptwzflnzc>

| L - Length ins | | | | | | | | | L - Length ins |
|----------------|--|---|---|---|--|--|--|--|----------------|
| 3/16 | | | | | | | | | 3/16 |
| 1/4 | | ● | ● | | | | | | 1/4 |
| 5/16 | | | ● | | | | | | 5/16 |
| 3/8 | | | ● | ● | | | | | 3/8 |
| 7/16 | | | | | | | | | 7/16 |
| 1/2 | | | ● | | | | | | 1/2 |
| 5/8 | | ● | | | | | | | 5/8 |
| 3/4 | | | | | | | | | 3/4 |
| 1 | | | | | | | | | 1 |
| 1 1/4 | | | | | | | | | 1 1/4 |
| 1 3/8 | | | | | | | | | 1 3/8 |
| 1 1/2 | | | | | | | | | 1 1/2 |
| - | | | | | | | | | - |
| - | | | | | | | | | - |
| - | | | | | | | | | - |
| - | | | | | | | | | - |
| - | | | | | | | | | - |

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
PTWZFLN35095ZC

PRODUCT DESCRIPTION EXAMPLE
6.19 x 3/8 Cross Recess (Z) Flange Plas-Fix® 60° Screw Steel / Zinc Plated (CR3)