


DIN 7500 Tap-Fix® Screws

Thread Rolling Screws for Metal Applications

T-Drive® (6-Lobe) Pan FORM C DIN 7985

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

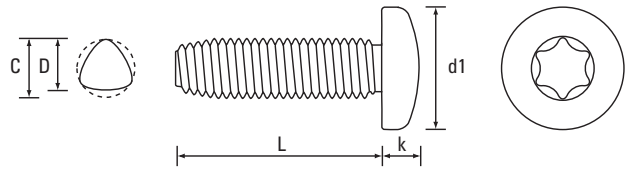

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	4.00	5.00	6.00	7.00	8.00	10.00	12.00	16.00	d1 - max
k - max	1.72	2.12	2.52	2.82	3.25	3.95	4.75	6.15	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T10	T15	T20	T25	T30	T40	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ttmwtxpanzc>

L - Length mm	Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ttmwtxpanzc									L - Length mm
4	●	●	●							4
5		●	●							5
6	●	●	● ●	●	●	● ●				6
8	●	●	● ●	●	● ●	●	●			8
10		●	● ●	●	● ●	● ●	● ●			10
12	●	●	● ●	●	● ●	● ●	● ●	●		12
14			●		●					14
16		●	●		● ●	● ●	● ●			16
18						●				18
20			● ●		●	● ●	●	●		20
25			●		●	●	● ●	●		25
30			●		●	●	●	●		30
35					●	●	●			35
40						●	●			40
45										45
50							●			50
-										-



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

TTMWTXPAN40020ZC
 TTMWTXPAN50016ZN

PRODUCT DESCRIPTION EXAMPLE

M4 x 20 T-Drive® (6-Lobe) Pan DIN 7500 FORM C Tap-Fix® Screw Steel / Zinc Plated (CR3)
 M5 x 16 T-Drive® (6-Lobe) Pan DIN 7500 FORM C Tap-Fix® Screw Steel / Black (CR3)