




T-Drive® (6-Lobe) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

Micro Diameter

MACHINE SCREWS - GRADE 4.8

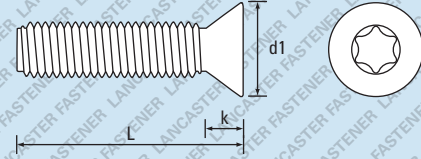

Also available in A2 Stainless Steel - See page 203

Further technical data is available on page 253

Table with columns for Thread (M1.6, M2, M2.5, etc.), Dia. Gauge, d1-max, k-ref, s-A/F, Recess (T5, T6, T8), L-Length mm, Bulk Carton Quantity, Small Box Quantity, Weight (KG) per 1,000.

Zinc Plated (CR3) - preferred and available from stock. Black (CR3) - non preferred and subject to a lead time and MOQ (M2.5 and above). Zinc Plated (CR3) & Black (CR3) - preferred and available from stock. See page 267 for further detail.

Table with columns: PRODUCT CODE EXAMPLE (MSMTDRCSK25005ZC, MSMTDRCSK25008ZN), PRODUCT DESCRIPTION EXAMPLE (M2.5 x 5 T-Drive® Countersunk DIN 965 Micro Screw Grade 4.8 Steel / Zinc Plated (CR3), M2.5 x 8 T-Drive® Countersunk DIN 965 Micro Screw Grade 4.8 Steel / Black (CR3))

T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd. 180° & 360° NYLOK® Blue Patching service available on M2 dia. and above. E. & O. E. See page 267 for further detail. © 2021, Lancaster Fastener Co Ltd. All images are copyright protected. NYLOK® is a registered trade mark of NYLOK®.

Carbon Steel Product Ranges

Stainless Steel Product Ranges

Brass Product Ranges

Technical Data