



TAP-FIX®


Thread Rolling Screws

FOR METAL

T-Drive® (6-Lobe) Socket Cap

Steel / Zinc Plated (CR3) & Lubricated

RoHS 2 Compliant

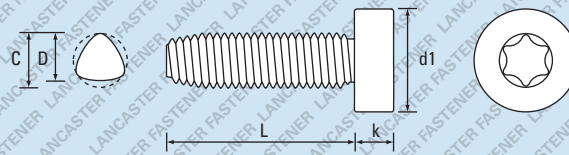

Further technical data is available on page 239

FORM E / EE SIMILAR

Dia. D max	M4	M5	M6	M8	M10	-	-	-	Dia. D max
Dia. C max	4.08	5.09	6.10	8.13	10.15	-	-	-	Dia. C max
d1 - max	7.00	8.50	10.00	13.00	16.00	-	-	-	d1 - max
k - max	4.00	5.00	6.00	8.00	10.00	-	-	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T20	T25	T30	T40	T50	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length mm
5									5
6									6
7									7
8									8
10	12,500 1,000 1.60		4,000 500 4.78						10
12	11,000 1,000 1.73		3,500 500 5.41						12
16	10,000 1,000 2.04		3,000 500 6.09						16
20	8,500 1,000 2.34		2,500 250 7.70						20
25		4,000 500 4.69	3,000 500 6.90						25
30			2,500 250 7.70						30
-									-
-									-
-									-
-									-
-									-
-									-

Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

TTMWTXSCCAP50025ZC

PRODUCT DESCRIPTION EXAMPLE

M5 x 25 T-Drive® Socket Cap DIN 7500 FORM E / EE Similar Tap-Fix® Screw Steel / Zinc Plated (CR3)

Tap-Fix® and T-Drive® are registered trade marks of Lancaster Fastener Co Ltd. E. & O. E.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.

Carbon Steel Product Ranges

Stainless Steel Product Ranges

Brass Product Ranges

Technical Data