

**CASTLE®**

Low priced, bulk packed, commodity size ranges


Self-Drilling Screws



All images are copyright protected

DIN7504**Cross Recess (H) Countersunk****Steel / Zinc Plated (CR3)**

RoHS 2 Compliant

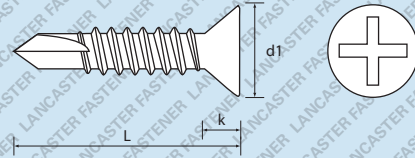

Further technical data is available on page 189

FORM P

Dia. mm	2.9	3.5	3.9	4.2	4.8	5.5	6.3	-	Dia. mm
Dia. Gauge	4	6	7	8	10	12	14	-	Dia. Gauge
d1 - max	5.50	6.80	7.50	8.10	9.50	10.80	12.40	-	d1 - max
k _{ref}	1.70	2.10	2.30	2.50	3.00	3.40	3.80	-	k _{ref}
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	2	2	2	2	3	3	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
9.5									3/8
13		27,000 N/A 0.77	20,000 N/A 0.90	17,000 N/A 1.22					1/2
16		22,000 N/A 0.91	18,000 N/A 1.05	15,000 N/A 1.46	11,000 N/A 2.04				5/8
19		18,000 N/A 1.10	14,000 N/A 1.22	13,000 N/A 1.63	9,500 N/A 2.37				3/4
22									7/8
25				10,000 N/A 2.10	7,000 N/A 2.68				1
32				7,500 N/A 2.43	5,000 N/A 3.02				1 1/4
38									1 1/2
45									1 3/4
50									2
60									2 1/2
70									2 3/4
75									3
80									3 1/4
90									3 1/2
100									4

Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

STDPHCSK48160ZC

PRODUCT DESCRIPTION EXAMPLE

4.8 x 16.0 Cross Recess (H) Countersunk DIN 7504 FORM P Self-Drilling Screw Steel / Zinc Plated (CR3)

CASTLE® is a registered trade mark of Lancaster Fastener Co Ltd
E. & O. E.

© 2018, Lancaster Fastener Co Ltd.

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com

29

TECHNICAL DATA

BRASS INSERTS
FOR PLASTICSRIVET BUSHES &
SELF-CLINCHING
FASTENERSK-SERIES®
SETZMUTTERNMICRO DIAMETER
SCREWSSCREWS FOR
PLASTICSHAMMER DRIVE
SCREWSTAMPER PROOF
SECURITY SCREWSROLLED THREAD
MACHINE SCREWSTAP-FIX® THREAD
ROLLING SCREWSSELF-DRILLING
SCREWSSELF-TAPPING
SCREWS