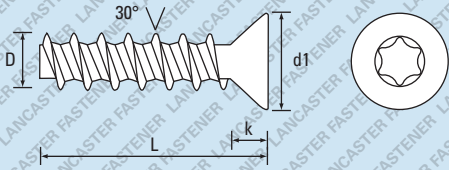


METRIC
Thread Forming Screws
 FOR PLASTICS

T-Drive® (6-Lobe) Countersunk
A2 Stainless Steel
 RoHS 2 Compliant


Also available in Steel / Zinc Plated - See page 110

Further technical data is available on page 246

Dia. D	2.2	2.5	3	3.5	4	5	6	-	Dia. D	
Dia. Gauge	-	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	3.80	4.70	5.50	7.30	8.40	9.30	11.30	-	-	d1 - max
k - ref	1.30	1.75	2.05	2.80	3.25	3.40	3.80	-	-	k - ref
s - A/F	-	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T8	T15	T20	T20	T30	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length mm	
	5									
6			70,000 1,000 0.28						6	
8			55,000 1,000 0.32	33,000 1,000 0.56					8	
10			40,000 1,000 0.38	26,000 1,000 0.61	20,000 1,000 0.93	17,000 1,000 1.34			10	
12			35,000 1,000 0.42	23,000 1,000 0.69	17,000 1,000 1.03	13,500 1,000 1.48			12	
14									14	
16			25,000 1,000 0.55	16,000 1,000 0.82	12,000 1,000 1.22	9,000 1,000 1.77			16	
18									18	
20					9,000 1,000 1.39	7,500 1,000 2.06			20	
25						5,500 500 2.43			25	
30						4,500 500 2.81			30	
-									-	
-									-	
-									-	
-									-	
-									-	

 A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE

SSPSBPTXCSK40010A2

PRODUCT DESCRIPTION EXAMPLE

4 x 10 T-Drive® Countersunk Plas-Tech® 30° Screw A2 Stainless Steel

Plas-Tech® and T-Drive® are registered trade marks of Lancaster Fastener Co Ltd. E. & O. E.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.