

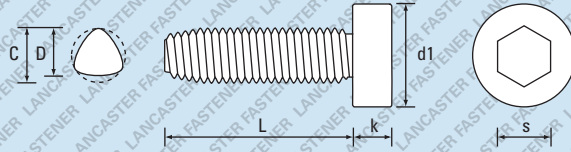
TAP-FIX®

# Thread Rolling Screws

FOR METAL

**Hexagon Socket Cap**
**Steel / Zinc Plated (CR3) & Lubricated**

RoHS 2 Compliant


**FORM E DIN 912 / EE ISO 4762**

Further technical data is available on page 239

Dia. D max	M4	M5	M6	M8	M10	-	-	-	Dia. D max
Dia. C max	4.08	5.09	6.10	8.13	10.15	-	-	-	Dia. C max
d1 - max	7.00	8.50	10.00	13.00	16.00	-	-	-	d1 - max
k - max	4.00	5.00	6.00	8.00	10.00	-	-	-	k - max
s - A/F	3.00	4.00	5.00	6.00	8.00	-	-	-	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000							L- Length mm	
5								5	
6								6	
7								7	
8	13,000   1,000   1.50	7,500   1,000   2.65						8	
10	12,500   1,000   1.60	7,000   1,000   2.80	4,000   500   4.40					10	
12	11,000   1,000   1.73	6,500   1,000   3.02	4,000   500   5.10					12	
16	10,000   1,000   2.06	5,500   1,000   3.50	3,500   500   5.78	1,500   250   11.16				16	
20	8,500   1,000   2.33	5,000   500   4.02	3,000   500   5.99	1,200   150   12.43				20	
25	7,000   1,000   2.71	4,000   500   4.58	3,000   500   6.75	1,200   150   13.88				25	
30		3,500   500   5.20	2,500   250   7.58	1,000   125   15.21				30	
35			2,500   250   8.60	1,000   125   17.17				35	
40			2,000   250   9.26	1,000   125   18.20				40	
45								45	
50			1,500   250   11.13	1,000   125   21.53				50	
-								-	
-								-	
-								-	

 Zinc Plated (CR3) - preferred and available from stock.

**PRODUCT CODE EXAMPLE**

TTMWHEXSCKCAP40012ZC

**PRODUCT DESCRIPTION EXAMPLE**

M4 x 12 Hexagon Socket Cap DIN 7500 FORM E DIN 912 / EE ISO 4762 Tap-Fix® Screw Steel / Zinc Plated (CR3)

 Tap-Fix® is a registered trade mark of Lancaster Fastener Co Ltd.  
 E. & O. E.  
 © 2021, Lancaster Fastener Co Ltd. All images are copyright protected.