

**LANCASTER**

ROLLED THREAD


**Machine Screws**

GRADE 4.8

**DIN 965****T-Drive® (6-Lobe) Countersunk**

Steel / Zinc Plated (CR3) &amp; Steel / Black (CR3)

RoHS 2 Compliant

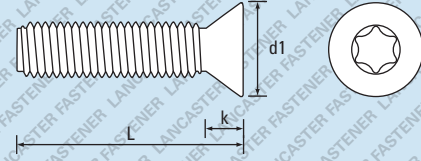

Also available in A2 &amp; A4-80 Stainless Steel - See pages 176 &amp; 218

Further technical data is available on page 241

Thread	M1.6	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Thread
Dia. Gauge	-	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	3.00	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	0.96	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	-	s - A/F
Recess	T5	T6	T8	T10	T15	T20	T25	T30	T40	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000									L- Length mm
3	400,000   1,000   0.21									3
4	333,000   1,000   0.22	200,000   1,000   0.22	100,000   1,000   0.28	55,000   1,000   0.43						4
5	286,000   1,000   0.23	160,000   1,000   0.24	100,000   1,000   0.30	50,000   1,000   0.44		26,000   1,000   0.68				5
6	286,000   1,000   0.24	133,000   1,000   0.25	90,000   1,000   0.30	50,000   1,000   0.45		26,000   1,000   0.68	16,000   1,000   1.35			6
8		83,000   1,000   0.26	67,000   1,000   0.33	45,000   1,000   0.46		22,000   1,000   0.80	12,000   1,000   1.40			8
10			56,000   1,000   0.34	35,000   1,000   0.51		19,000   1,000   0.95	11,500   1,000   1.62	8,000   1,000   2.30		10
12			48,000   1,000   0.40	30,000   1,000   0.60		17,000   1,000   1.12	10,000   1,000   1.94	7,000   1,000   2.30	3,600   500   5.30	12
16			35,000   1,000   0.46	25,000   1,000   0.67		14,000   1,000   1.42	8,000   1,000   2.35	5,500   500   3.30	3,000   500   6.60	16
20			25,000   1,000   0.52	21,000   1,000   0.73		12,000   1,000   1.68	7,000   1,000   2.78	4,800   500   4.16	2,500   250   7.80	20
25				16,000   1,000   0.80		9,000   1,000   2.09	5,500   500   3.37	4,000   500   4.80		25
30				13,000   1,000   0.87		8,000   1,000   2.09	5,000   500   3.95	3,200   500   5.60		30
35						7,000   1,000   2.12	4,000   500   4.20	3,000   250   6.40		35
40						5,000   500   2.22	3,600   500   5.21	2,500   250   7.20		40
45							3,200   250   5.71	1,800   250   6.40		45
50				4,000   500   1.14		3,500   500   2.42	2,000   250   5.99			50
55										55
60										60
70										70
80										80
90										90
100										100

Zinc Plated (CR3) - preferred and available from stock.  
 Black (CR3) - non preferred and subject to a lead time and MOQ (M2.5 and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

## PRODUCT CODE EXAMPLE

MSMTRCSK25005ZC  
 MSMTRCSK40012ZN

## PRODUCT DESCRIPTION EXAMPLE

M2.5 x 5 T-Drive® Countersunk DIN 965 Machine Screw Grade 4.8 Steel / Zinc Plated (CR3)  
 M4 x 12 T-Drive® Countersunk DIN 965 Machine Screw Grade 4.8 Steel / Black (CR3)

T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd.

180° & 360° NYLOK® Blue Patching service available on M2 dia. and above.

E. & O. E.

See page 267 for further detail.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.

NYLOK® is a registered trade mark of NYLOK®.