
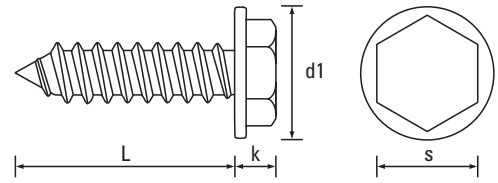


Self-Tapping Screws

Screws for Sheet Metal Applications

Washer Hexagon DIN 6928 Type C

Steel / Zinc Plated (CR3)



Dia. mm	2.2	2.9	3.5	3.5*	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	6	8	10	12	14	Dia. Gauge
d1 - max	-	-	8.30	-	8.80	10.50	11.00	13.50	d1 - max
k - max	-	-	3.40	-	4.10	4.30	5.40	5.90	k - max
s - A/F max	-	-	5.50	1/4"	7.00	8.00	8.00	10.00	s - A/F max
Recess	-	-	-	-	-	-	-	-	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ltabwhxzc>

L - Length mm									L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5				●	●				3/8
13				●	●	●	●	●	1/2
16					●	●	●	●	5/8
19					●	●	●	●	3/4
22									7/8
25					●	●	●	●	1
32								●	1 1/4
38								●	1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

* Not to DIN 6928

PRODUCT CODE EXAMPLE
 LTABWHX55160ZC

PRODUCT DESCRIPTION EXAMPLE
 5.5 x 16.0 Washer Hexagon DIN 6928 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)