




# Self-Tapping Screws

## Cross Recess (Z) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

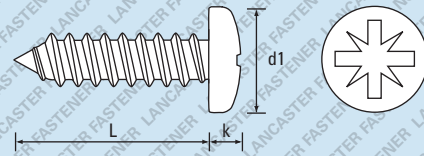

Also available in A2 Stainless Steel - See page 159

Further technical data is available on pages 234 - 236

### TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
4.5	115,000   1,000   0.16	50,000   1,000   0.33							3/16
6.5	86,000   1,000   0.20	45,000   1,000   0.39	28,000   1,000   0.66	19,000   1,000   0.92	16,000   1,000   1.14				1/4
8	80,000   1,000   0.24	40,000   1,000   0.46	24,000   1,000   0.75		15,000   1,000   1.20				5/16
9.5	70,000   1,000   0.26	30,000   1,000   0.50	24,000   1,000   0.83	18,000   1,000   1.05	14,000   1,000   1.28	10,000   1,000   1.78			3/8
13	55,000   1,000   0.33	28,000   1,000   0.61	18,000   1,000   1.00	15,000   1,000   1.27	13,000   1,000   1.53	7,500   1,000   2.11	7,000   1,000   3.03	4,500   500   4.82	1/2
16	35,000   1,000   0.39	25,000   1,000   0.72	15,000   1,000   1.17	13,000   1,000   1.46	11,000   1,000   1.78	7,000   1,000   2.43	6,000   1,000   3.47	3,500   500   5.41	5/8
19		20,000   1,000   0.84	13,000   1,000   1.35	12,000   1,000   1.65	10,000   1,000   2.04	7,000   1,000   2.76	4,500   500   3.91	3,500   500   5.99	3/4
22		20,000   1,000   0.95	13,000   1,000   1.51		9,000   1,000   2.29	6,500   1,000   3.08			7/8
25		15,000   1,000   1.06	10,000   1,000   1.68	9,500   1,000   2.03	8,000   1,000   2.55	5,000   500   3.41	4,000   500   4.79	3,000   500   7.16	1
32		10,000   1,000   1.28	8,000   1,000   2.02	7,500   500   2.38	6,000   500   3.05	4,500   500   4.06	3,500   500   5.67	2,500   250   8.33	1 1/4
38		7,000   500   1.52	7,000   1,000   2.36	5,000   500   2.73	5,000   500   3.56	3,000   500   4.71	3,000   500   6.55	2,000   250   9.50	1 1/2
45			4,500   500   2.70		3,500   500   4.07	3,000   250   5.36	2,500   250   7.43	1,700   250   10.66	1 3/4
50			3,000   500   3.04		2,500   500   4.58	2,000   250   6.01	2,000   250   8.31	1,200   250   11.82	2
57					2,500   250   4.65	2,000   250   6.08		1,000   200   12.10	2 1/4
63					2,300   250   4.93	1,500   250   6.65	1,500   200   9.05	1,000   200   12.60	2 1/2
70					2,000   250   5.50	1,000   250   7.40			2 3/4
75						1,000   200   8.61	1,000   200   11.83	750   200   14.60	3

Zinc Plated (CR3) - preferred and available from stock.  
Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

#### PRODUCT CODE EXAMPLE

LTABZPAN42130ZC  
LTABZPAN55250ZN

#### PRODUCT DESCRIPTION EXAMPLE

4.2 x 13.0 Cross Recess (Z) Pan Type C DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)  
5.5 x 25.0 Cross Recess (Z) Pan Type C DIN 7981 Self-Tapping Screw Steel / Black (CR3)


**CASTLE®**

Low priced, bulk packed, commodity size ranges

**DIN 7981****Cross Recess (Z) Pan****Steel / Zinc Plated (CR3)**

RoHS 2 Compliant

# Self-Tapping Screws

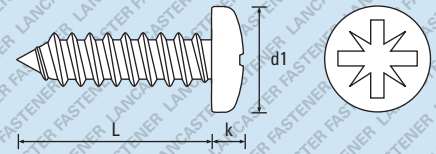

Further technical data is available on pages 234 - 236

**TYPE C** pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5	30,000   N/A   0.50	24,000   N/A   0.83			14,000   N/A   1.28	10,000   N/A   1.78			3/8
13	28,000   N/A   0.61	18,000   N/A   1.00			13,000   N/A   1.53	7,500   N/A   2.11			1/2
16	25,000   N/A   0.72	15,000   N/A   1.17			11,000   N/A   1.78	7,000   N/A   2.43			5/8
19	20,000   N/A   0.84	13,000   N/A   1.35			10,000   N/A   2.04	7,000   N/A   2.76			3/4
22									7/8
25	15,000   N/A   1.06	10,000   N/A   1.68			8,000   N/A   2.55	5,000   N/A   3.41			1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

 Zinc Plated (CR3) - preferred and available from stock.
**PRODUCT CODE EXAMPLE**

STABZPAN35190ZC

**PRODUCT DESCRIPTION EXAMPLE**

3.5 x 19.0 Cross Recess (Z) Pan Type C DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)


CASTLE® is a registered trade mark of Lancaster Fastener Co Ltd.

E. &amp; O. E.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.

# Self-Tapping Screws

**Cross Recess (Z) Countersunk**  
**Steel / Zinc Plated (CR3) & Steel / Black (CR3)**  
 RoHS 2 Compliant

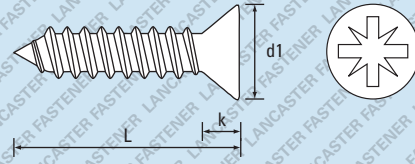

Also available in A2 Stainless Steel - See page 160

Further technical data is available on pages 234 - 236

## TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess

L- Length mm	Bulk Carton Quantity			Small Box Quantity			Weight (KG) per 1,000			L- Length ins												
	Qty	Weight (KG)	Weight (LBS)	Qty	Weight (KG)	Weight (LBS)	Qty	Weight (KG)	Weight (LBS)													
4.5	145,000	1,000	0.10							3/16												
6.5	120,000	1,000	0.14	65,000	1,000	0.29	42,000	1,000	0.47	1/4												
8	110,000	1,000	0.17	55,000	1,000	0.37	39,000	1,000	0.56	5/16												
9.5	90,000	1,000	0.20	40,000	1,000	0.40	28,000	1,000	0.64	3/8												
13	75,000	1,000	0.27	35,000	1,000	0.51	22,000	1,000	0.81	1/2												
16	45,000	1,000	0.33	30,000	1,000	0.63	18,000	1,000	0.98	5/8												
19		25,000	1,000	0.74	16,000	1,000	1.15	16,000	1,000	1.26	3/4											
22		20,000	1,000	0.85	13,000	1,000	1.33	12,000	1,000	1.45	7/8											
25		17,000	1,000	0.96	13,000	1,000	1.50	10,000	1,000	1.64	1											
32		15,000	1,000	1.18	10,000	1,000	1.84	8,000	1,000	2.10	1 1/4											
38				7,500	1,000	2.18	7,500	500	2.41	4,000	500	3.28	4,000	500	4.27	3,300	500	5.82	2,500	250	7.85	1 1/2
45				5,500	500	2.52	4,000	500	3.79	3,000	500	4.92	2,000	250	6.70	2,200	250	9.03	1 3/4			
50				3,500	500	2.86	5,000	500	3.18	3,000	500	4.00	2,500	250	5.57	2,000	250	7.40	1,500	250	10.21	2
57							2,700	250	4.30	2,000	250	5.64	2,000	250	7.60							2 1/4
63							2,300	250	4.63	2,000	250	6.00	1,500	200	8.20	1,000	200	11.00				2 1/2
70							1,500	250	4.88													2 3/4
75										1,500	200	8.17	1,000	200	11.10	1,000	125	13.40				3

  Zinc Plated (CR3) - preferred and available from stock.
   Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).
   Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.
 See page 267 for further detail.

PRODUCT CODE EXAMPLE	PRODUCT DESCRIPTION EXAMPLE
LTABZCSK48160ZC	4.8 x 16.0 Cross Recess (Z) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)
LTABZCSK29130ZN	2.9 x 13.0 Cross Recess (Z) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Black (CR3)


**CASTLE®**

Low priced, bulk packed, commodity size ranges

**DIN 7982****Cross Recess (Z) Countersunk****Steel / Zinc Plated (CR3)**

RoHS 2 Compliant

# Self-Tapping Screws

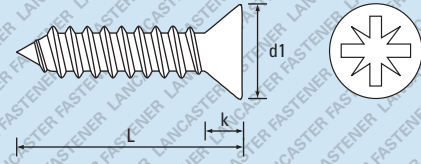

Further technical data is available on pages 234 - 236

**TYPE C** pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5	40,000	N/A   0.40	28,000	N/A   0.64					3/8
13	35,000	N/A   0.51	22,000	N/A   0.81	16,000	N/A   1.25			1/2
16	30,000	N/A   0.63	18,000	N/A   0.98	12,000	N/A   1.50	9,000	N/A   1.99	5/8
19	25,000	N/A   0.74	16,000	N/A   1.15	12,000	N/A   1.65	8,000	N/A   2.31	3/4
22									7/8
25			13,000	N/A   1.50	9,000	N/A   2.26	6,000	N/A   2.97	1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

 Zinc Plated (CR3) - preferred and available from stock.

## PRODUCT CODE EXAMPLE

STABZCSK42250ZC

## PRODUCT DESCRIPTION EXAMPLE

4.2 x 25.0 Cross Recess (Z) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)

CASTLE® is a registered trade mark of Lancaster Fastener Co Ltd.

E. &amp; O. E.


© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.

# Self-Tapping Screws

## Cross Recess (Z) Flange

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

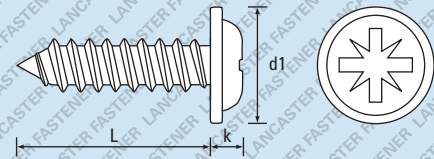

Also available in A2 Stainless Steel - See page 161

Further technical data is available on pages 234 - 236

### TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	6.53	8.15	8.90	9.75	11.38	13.00	14.55	d1 - max
k - max	-	1.60	1.88	2.00	2.36	2.90	3.15	3.68	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5	48,000   1,000   0.39	31,000   1,000   0.66			19,000   1,000   1.02				1/4
8	40,000   1,000   0.48	28,000   1,000   0.75			17,000   1,000   1.11				5/16
9.5	35,000   1,000   0.50	26,000   1,000   0.83	19,500   1,000   0.92	15,000   1,000   1.28	10,000   1,000   1.78				3/8
13	30,000   1,000   0.61	20,000   1,000   1.00	15,500   1,000   1.21	12,000   1,000   1.53	9,000   1,000   2.11	6,000   1,000   3.03			1/2
16	25,000   1,000   0.72	15,000   1,000   1.17	13,500   1,000   1.28	11,000   1,000   1.68	7,000   1,000   2.43	5,500   500   3.47			5/8
19	21,000   1,000   0.84	13,000   1,000   1.35	10,500   1,000   1.45	11,000   1,000   1.79	6,000   1,000   2.76	5,000   500   3.91			3/4
22									7/8
25			10,000   1,000   1.68			7,000   1,000   2.55	5,000   500   3.41	4,500   500   4.79	1
32			8,000   1,000   2.02			5,000   500   3.05	3,500   500   4.06	3,500   500   5.67	1 1/4
38			6,000   1,000   2.36			4,000   500   3.56	3,500   500   4.71	1 1/2	
45					3,500   500   4.07	2,500   250   5.36	1 3/4		
50					2,500   500   4.58	2,500   250   6.01	2		
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.  
 Black (CR3) - non preferred and subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 287 for further detail.

#### PRODUCT CODE EXAMPLE

LTABZFLN55320ZC  
 LTABZFLN42160ZN

#### PRODUCT DESCRIPTION EXAMPLE

5.5 x 32.0 Cross Recess (Z) Flange Type C BS 4174 Self-Tapping Screw Steel / Zinc Plated (CR3)  
 4.2 x 16.0 Cross Recess (Z) Flange Type C BS 4174 Self-Tapping Screw Steel / Black (CR3)

**CASTLE®**


Low priced, bulk packed, commodity size ranges

**BS 4174****Cross Recess (Z) Flange**

Steel / Zinc Plated (CR3)

RoHS 2 Compliant

# Self-Tapping Screws

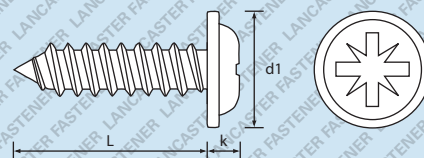

Further technical data is available on pages 234 - 236

**TYPE C** pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	6.53	8.15	8.90	9.75	11.38	13.00	14.55	d1 - max
k - max	-	1.60	1.88	2.00	2.36	2.90	3.15	3.68	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5	35,000   N/A   0.50	26,000   N/A   0.83			15,000   N/A   1.28	10,000   N/A   1.78			3/8
13	30,000   N/A   0.61	20,000   N/A   1.00			12,000   N/A   1.53	9,000   N/A   2.11			1/2
16	25,000   N/A   0.72	15,000   N/A   1.17			11,000   N/A   1.78	7,000   N/A   2.43			5/8
19	21,000   N/A   0.84	13,000   N/A   1.35			11,000   N/A   2.04	6,000   N/A   2.76			3/4
22									7/8
25	10,000   N/A   1.68				7,000   N/A   2.55	5,000   N/A   3.41			1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

 Zinc Plated (CR3) - preferred and available from stock.

## PRODUCT CODE EXAMPLE

STABZFLN42250ZC

## PRODUCT DESCRIPTION EXAMPLE

4.2 x 25.0 Cross Recess (Z) Flange Type C BS 4174 Self-Tapping Screw Steel / Zinc Plated (CR3)


CASTLE® is a registered trade mark of Lancaster Fastener Co Ltd.

E. &amp; O. E.

© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.

# Self-Tapping Screws

**Cross Recess (H) Pan**  
**Steel / Zinc Plated (CR3) & Steel / Black (CR3)**  
 RoHS 2 Compliant

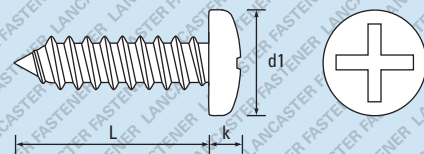

Further technical data is available on pages 234 - 236

TYPE C pointed										
Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm	
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge	
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max	
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max	
s - A/F	-	-	-	-	-	-	-	-	s - A/F	
Recess	1	1	2	2	2	2	3	3	Recess	
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000									L- Length ins
4.5	115,000   1,000   0.21									3/16
6.5	86,000   1,000   0.23	45,000   1,000   0.44	28,000   1,000   0.70	19,000   1,000   0.92	16,000   1,000   1.09					1/4
8										5/16
9.5	70,000   1,000   0.30	30,000   1,000   0.50	24,000   1,000   0.83	18,000   1,000   1.05	14,000   1,000   1.28	10,000   1,000   1.78				3/8
13	55,000   1,000   0.36	28,000   1,000   0.61	18,000   1,000   1.00	15,000   1,000   1.27	13,000   1,000   1.53	7,500   1,000   2.11	7,000   1,000   3.03	4,500   500   4.82		1/2
16	35,000   1,000   0.40	25,000   1,000   0.72	15,000   1,000   1.17	13,000   1,000   1.44	11,000   1,000   1.72	7,000   1,000   2.43	6,000   1,000   3.47	3,500   500   5.41		5/8
19		20,000   1,000   0.84	13,000   1,000   1.35	12,000   1,000   1.65	10,000   1,000   2.04	7,000   1,000   2.76	4,500   500   3.91	3,500   500   5.99		3/4
22		20,000   1,000   0.95	13,000   1,000   1.51	11,000   1,000   1.84	9,000   1,000   2.29	6,500   1,000   3.08	4,000   500   4.35	3,000   500   6.53		7/8
25		15,000   1,000   1.06	10,000   1,000   1.68	9,500   1,000   2.03	8,000   1,000   2.55	5,000   1,000   3.41	4,000   500   4.85	3,000   500   7.16		1
32		10,000   1,000   1.28	8,000   1,000   2.02	7,500   1,000   2.30	6,000   500   3.05	4,500   500   4.06	3,500   500   5.67	2,500   250   8.33		1 1/4
38		7,000   1,000   1.42	7,000   1,000   2.36	5,000   1,000   2.65	5,000   500   3.56	3,000   500   4.71	3,000   500   6.55	2,000   250   9.50		1 1/2
45			3,000   500   3.01	3,500   500   4.07	3,000   500   5.36	2,500   250   7.43	1,700   250   10.66			1 3/4
50			3,000   500   3.04	2,500   500   4.52	2,000   250   6.01	2,000   250   8.31	1,200   250   11.82			2
57										2 1/4
63								1,000   200   12.60		2 1/2
70										2 3/4
75										3
80										3 1/4

Zinc Plated (CR3) - preferred and available from stock.  
 Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).  
 Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE	PRODUCT DESCRIPTION EXAMPLE
LTABHPAN35130ZC	3.5 x 13.0 Cross Recess (H) Pan Type C DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)
LTABHPAN42190ZN	4.2 x 19.0 Cross Recess (H) Pan Type C DIN 7981 Self-Tapping Screw Steel / Black (CR3)

Carbon Steel Product Ranges  
 Stainless Steel Product Ranges  
 Brass Product Ranges  
 Technical Data


**CASTLE®**

Low priced, bulk packed, commodity size ranges

**DIN 7981****Cross Recess (H) Pan****Steel / Zinc Plated (CR3)**

RoHS 2 Compliant

# Self-Tapping Screws

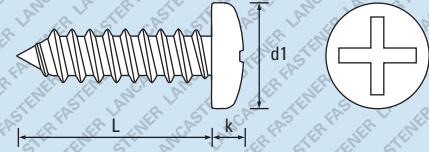

Further technical data is available on pages 234 - 236

**TYPE C** pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5	30,000   N/A   0.50	24,000   N/A   0.83	18,000   N/A   1.05	14,000   N/A   1.28	10,000   N/A   1.78				3/8
13	28,000   N/A   0.61	18,000   N/A   1.00	15,000   N/A   1.27	13,000   N/A   1.53	7,500   N/A   2.11				1/2
16	25,000   N/A   0.72	15,000   N/A   1.17	13,000   N/A   1.46	11,000   N/A   1.72	7,000   N/A   2.43				5/8
19	20,000   N/A   0.84	13,000   N/A   1.35	12,000   N/A   1.65	10,000   N/A   2.04	7,000   N/A   2.76				3/4
22									7/8
25	10,000   N/A   1.68		9,500   N/A   2.03	8,000   N/A   2.55	5,000   N/A   3.41				1
32	8,000   N/A   2.02		7,500   N/A   2.38	6,000   N/A   3.05	4,500   N/A   4.06				1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3
80									3 1/4

 Zinc Plated (CR3) - preferred and available from stock.
**PRODUCT CODE EXAMPLE**

STABHPAN35130ZC

**PRODUCT DESCRIPTION EXAMPLE**

3.5 x 13.0 Cross Recess (H) Pan Type C DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)

CASTLE® is a registered trade mark of Lancaster Fastener Co Ltd.

E. &amp; O. E.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.






# Self-Tapping Screws

## Cross Recess (H) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

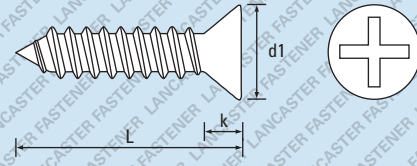

Further technical data is available on pages 234 - 236

### TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm	
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge	
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max	
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref	
s - A/F	-	-	-	-	-	-	-	-	s - A/F	
Recess	1	1	2	2	2	2	3	3	Recess	
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins	
4.5									3/16	
6.5	120,000   1,000   0.18	65,000   1,000   0.31							1/4	
8									5/16	
9.5	90,000   1,000   0.23	40,000   1,000   0.40	28,000   1,000   0.61	25,000   1,000   0.66	17,000   1,000   0.99			3/8		
13	75,000   1,000   0.27	35,000   1,000   0.51	22,000   1,000   0.81	21,000   1,000   0.88	16,000   1,000   1.25	11,000   1,000   1.67	10,000   1,000   2.30	1/2		
16	30,000   1,000   0.63		18,000   1,000   0.98	18,000   1,000   1.07	12,000   1,000   1.50	9,000   1,000   1.99	8,000   1,000   2.74	5/8		
19	25,000   1,000   0.74	16,000   1,000   1.15	16,000   1,000   1.34	12,000   1,000   1.76	8,000   1,000   2.31	6,000   1,000   3.18	4,500   500   4.35	3/4		
22			13,000   1,000   1.33	12,000   1,000   1.45	11,000   1,000   2.01	7,000   1,000   2.64			7/8	
25	19,000   1,000   0.96	13,000   1,000   1.50	10,000   1,000   1.64	9,000   1,000   2.26	6,000   1,000   2.97	5,000   500   4.06	3,800   500   5.52	1		
32			10,000   1,000   1.84	8,000   1,000   2.10	5,000   1,000   2.77	5,500   500   3.62	4,000   500   4.94	3,000   250   6.69	1 1/4	
38			7,500   1,000   2.41		4,000   500   3.28	4,000   500   4.27	3,300   500   5.82	3,000   250   7.85	1 1/2	
45							3,000   500   4.92	2,000   250   6.70	1 3/4	
50					3,000   500   4.30	2,500   250   5.57	2,000   250   7.58	1,500   250   10.21	2	
57									2 1/4	
63							2,000   250   6.07			2 1/2
70							1,200   250   6.45			2 3/4
75									3	

Zinc Plated (CR3) - preferred and available from stock.  
Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

#### PRODUCT CODE EXAMPLE

LTABHCSK42160ZC  
LTABHCSK35095ZN

#### PRODUCT DESCRIPTION EXAMPLE

4.2 x 16.0 Cross Recess (H) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)  
3.5 x 9.5 Cross Recess (H) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Black (CR3)


**CASTLE®**

Low priced, bulk packed, commodity size ranges

**DIN 7982****Cross Recess (H) Countersunk****Steel / Zinc Plated (CR3)**

RoHS 2 Compliant

# Self-Tapping Screws

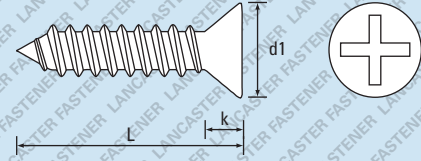

Further technical data is available on pages 234 - 236

**TYPE C** pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5	40,000   N/A   0.40	28,000   N/A   0.61							3/8
13	35,000   N/A   0.51	22,000   N/A   0.81	21,000   N/A   0.88	16,000   N/A   1.25	11,000   N/A   1.67				1/2
16	30,000   N/A   0.63	18,000   N/A   0.98	18,000   N/A   1.07	12,000   N/A   1.50	9,000   N/A   1.99				5/8
19	25,000   N/A   0.74	16,000   N/A   1.15	16,000   N/A   1.26	12,000   N/A   1.76	8,000   N/A   2.31				3/4
22									7/8
25	13,000   N/A   1.50		10,000   N/A   1.64	9,000   N/A   2.26	6,000   N/A   2.97				1
32	10,000   N/A   1.84							5,500   N/A   3.62	1 1/4
38								4,000   N/A   4.27	1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.

## PRODUCT CODE EXAMPLE

STABHCSK42160ZC

## PRODUCT DESCRIPTION EXAMPLE

4.2 x 16.0 Cross Recess (H) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)


CASTLE® is a registered trade mark of Lancaster Fastener Co Ltd.

E. &amp; O. E.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.

# Self-Tapping Screws

**T-Drive® (6-Lobe) Pan**  
**Steel / Zinc Plated (CR3) & Steel / Black (CR3)**  
 RoHS 2 Compliant

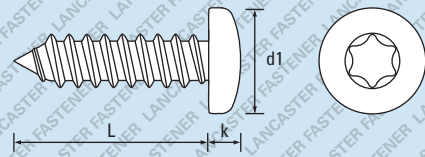

Further technical data is available on pages 234 - 236

TYPE C pointed												
Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm			
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge			
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max			
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max			
s - A/F	-	-	-	-	-	-	-	-	s - A/F			
Recess	T8	T10	T15	T15	T20	T25	T25	T30	Recess			
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins			
4.5									3/16			
6.5	86,000   1,000   0.23	45,000   1,000   0.41	28,000   1,000   0.71				16,000   1,000   1.12			1/4		
8	40,000   1,000   0.49	24,000   1,000   0.75								5/16		
9.5	30,000   1,000   0.50	24,000   1,000   0.88	18,000   1,000   1.20	14,000   1,000   1.33	10,000   1,000   1.98					3/8		
13	28,000   1,000   0.62	18,000   1,000   1.00	15,000   1,000   1.35	13,000   1,000   1.53	7,500   1,000   2.20	7,000   1,000   3.19	4,500   500   4.67			1/2		
16	25,000   1,000   0.78	15,000   1,000   1.20	13,000   1,000   1.55	11,000   1,000   1.70	7,000   1,000   2.40	6,000   1,000   3.54	3,500   500   5.09			5/8		
19	20,000   1,000   0.85	13,000   1,000   1.30	12,000   1,000   1.75	10,000   1,000   1.88	7,000   1,000   2.76	4,500   500   3.95	3,500   500   5.60			3/4		
22			13,000   1,000   1.46	11,000   1,000   1.95	9,000   1,000   2.20	6,500   1,000   3.03				7/8		
25	15,000   1,000   1.07	10,000   1,000   1.60	9,500   1,000   2.16	8,000   1,000   2.40	5,000   500   3.30	4,000   500   4.67	3,000   500   6.62			1		
32	10,000   1,000   1.31	8,000   1,000   1.88	7,500   1,000   2.58	6,000   500   2.80	4,500   500   4.00			2,500   250   8.33			1 1/4	
38			7,000   1,000   2.27	5,000   500   2.84	5,000   500   3.20	3,000   500   4.20			2,000   250   8.70			1 1/2
45							3,000   250   4.40					1 3/4
50					2,500   250   4.00	2,000   250   5.65					2	
57											2 1/4	
63											2 1/2	
70											2 3/4	
75											3	

Zinc Plated (CR3) - preferred and available from stock.  
 Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

PRODUCT CODE EXAMPLE	PRODUCT DESCRIPTION EXAMPLE
LTABTXPAN48190ZC	4.8 x 19.0 T-Drive® Pan Type C DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)
LTABTXPAN35160ZN	3.5 x 16.0 T-Drive® Pan Type C DIN 7981 Self-Tapping Screw Steel / Black (CR3)

T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd.  
 E. & O. E.  
 © 2021 Lancaster Fastener Co Ltd. All images are copyright protected.




## Self-Tapping Screws

## T-Drive® (6-Lobe) Countersunk

Steel / Zinc Plated (CR3) &amp; Steel / Black (CR3)

RoHS 2 Compliant

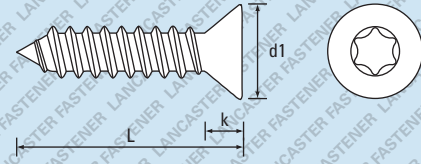

Further technical data is available on pages 234 - 236

## TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T8	T10	T15	T20	T25	T25	T30	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5	40,000   1,000   0.42	28,000   1,000   0.60			17,000   1,000   0.99			3/8	
13	35,000   1,000   0.51	22,000   1,000   0.80	21,000   1,000   0.96			16,000   1,000   1.09	11,000   1,000   1.60	1/2	
16	30,000   1,000   0.63	18,000   1,000   0.90			12,000   1,000   1.32	9,000   1,000   1.80	5/8		
19	25,000   1,000   0.67	16,000   1,000   1.03			12,000   1,000   1.53	8,000   1,000   2.00	3/4		
22									7/8
25			13,000   1,000   1.40			9,000   1,000   1.97	6,000   1,000   2.60	1	
32					5,000   1,000   2.38	5,500   500   3.19	3,000   500   6.09		1 1/4
38					4,000   500   2.80	4,000   500   3.78	2,500   250   6.93		1 1/2
45									1 3/4
50							1,500   250   8.93	2	
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.  
 Black (CR3) - non preferred and subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

## PRODUCT CODE EXAMPLE

LTABTXCSK48380ZC  
 LTABTXCSK29130ZN

## PRODUCT DESCRIPTION EXAMPLE

4.8 x 38.0 T-Drive® Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)  
 2.9 x 13.0 T-Drive® Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Black (CR3)

T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd.

E. & O. E.

© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.




# Self-Tapping Screws

## Cross Recess (Z) Raised Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

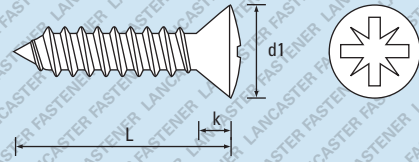

Further technical data is available on pages 234 - 236

### TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5	40,000   1,000   0.46	32,000   1,000   0.76							3/8
13	35,000   1,000   0.58	20,000   1,000   0.93	18,000   1,000   1.11	14,000   1,000   1.44	9,500   1,000   1.64			1/2	
16	30,000   1,000   0.69	20,000   1,000   1.10	15,000   1,000   1.30	12,000   1,000   1.69	9,000   1,000   2.30			5/8	
19	27,000   1,000   0.80	13,000   1,000   1.27	12,000   1,000   1.49	10,000   1,000   1.95	7,000   1,000   2.62	5,000   1,000   3.63		3/4	
22		13,000   1,000   1.44	10,000   1,000   1.63	10,000   1,000   2.20	7,000   1,000   2.94			7/8	
25	20,000   1,000   1.03	12,000   1,000   1.61	10,000   1,000   1.87	8,500   1,000   2.45	6,300   1,000   3.27			1	
32		8,000   1,000   1.95	6,500   1,000   2.25	7,000   500   2.96	5,000   500   3.92	4,000   500   5.39		1 1/4	
38		7,000   1,000   2.30		5,000   500   3.47	4,500   500   4.57	3,000   500   6.27		1 1/2	
45				5,000   500   3.87	3,500   500   5.23			1 3/4	
50				3,500   500   3.98	2,500   250   5.55	2,400   250   7.28		2	
57								2 1/4	
63								2 1/2	
70								2 3/4	
75								3	

Zinc Plated (CR3) - preferred and available from stock  
Black (CR3) - non preferred and subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

#### PRODUCT CODE EXAMPLE

LTABZRS5190ZC  
LTABZRS35320ZN

#### PRODUCT DESCRIPTION EXAMPLE

5.5 x 19.0 Cross Recess (Z) Raised Countersunk Type C DIN 7983 Self-Tapping Screw Steel / Zinc Plated (CR3)  
3.5 x 32.0 Cross Recess (Z) Raised Countersunk Type C DIN 7983 Self-Tapping Screw Steel / Black (CR3)



## Self-Tapping Screws


WITH EARTHING NIBS



## Cross Recess (Z) Washer Pan

Steel / Zinc Plated (CR3) &amp; Steel / Black (CR3)

RoHS 2 Compliant

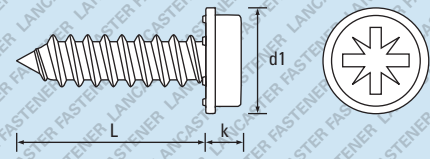

Further technical data is available on pages 234 - 236

## TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	8.50	-	8.50	-	-	-	d1 - max
d2 - ref	-	-	7.00	-	7.00	-	-	-	d2 - ref
k - max	-	-	2.60	-	2.60	-	-	-	k - max
Recess	-	-	2	-	2	-	-	-	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5			18,000   1,000   1.07			16,000   1,000   1.19			3/8
13			13,000   1,000   1.25			14,000   1,000   1.39			1/2
16									5/8
19									3/4
22									7/8
25									1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.  
 Black (CR3) - non preferred and subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

## PRODUCT CODE EXAMPLE

ENABZWPN42130ZC  
 ENABZWPN35095ZN

## PRODUCT DESCRIPTION EXAMPLE

4.2 x 13.0 Cross Recess (Z) Washer Pan With Earthing Nibs Type C Self-Tapping Screw Steel / Zinc Plated (CR3)  
 3.5 x 9.5 Cross Recess (Z) Washer Pan With Earthing Nibs Type C Self-Tapping Screw Steel / Black (CR3)

E. &amp; O. E.

© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.




# Self-Tapping Screws

## Slotted Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

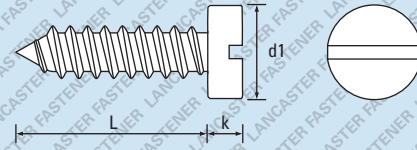

Further technical data is available on pages 234 - 236

### TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm		
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge		
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max		
k - max	1.35	1.75	2.10	2.25	2.45	2.80	3.20	3.65	k - max		
s - A/F	-	-	-	-	-	-	-	-	s - A/F		
Recess	-	-	-	-	-	-	-	-	Recess		
L - Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L - Length ins		
4.5									3/16		
6.5	86,000   1,000   0.21	45,000   1,000   0.38	28,000   1,000   0.62							1/4	
8									5/16		
9.5	70,000   1,000   0.27	30,000   1,000   0.49	24,000   1,000   0.74	18,000   1,000   0.98	14,000   1,000   1.19	10,000   1,000   1.77			3/8		
13	28,000   1,000   0.58	18,000   1,000   0.93					13,000   1,000   1.36	7,500   1,000   1.94	7,000   1,000   2.79	1/2	
16	25,000   1,000   0.67	15,000   1,000   1.09	13,000   1,000   1.39	11,000   1,000   1.61	7,000   1,000   2.32	6,000   1,000   3.12	3,500   500   4.19	5/8			
19	20,000   1,000   0.78	13,000   1,000   1.22	12,000   1,000   1.54	10,000   1,000   1.92	7,000   1,000   2.52	4,500   1,000   3.50	3,500   500   4.85	3/4			
22									7/8		
25	15,000   1,000   0.94	10,000   1,000   1.53	9,500   1,000   1.83	8,000   1,000   2.17	5,000   500   3.04	4,000   500   4.24	3,000   500   6.00	1			
32			8,000   1,000   1.96	7,500   1,000   2.25	6,000   500   2.64	4,500   500   3.67	3,500   500   5.13	2,500   250   6.87	1 1/4		
38					5,000   500   3.12				2,000   250   7.80	1 1/2	
45									1 3/4		
50					2,500   500   4.07				1,200   250   10.14	2	
57									2 1/4		
63									2 1/2		
70									2 3/4		
75									3		

Zinc Plated (CR3) - preferred and available from stock.  
Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).

See page 267 for further detail.

#### PRODUCT CODE EXAMPLE

LTABSLPAN63500ZC  
LTABSLPAN35250ZN

#### PRODUCT DESCRIPTION EXAMPLE

6.3 x 50.0 Slotted Pan Type C DIN 7971 Self-Tapping Screw Steel / Zinc Plated (CR3)  
3.5 x 25.0 Slotted Pan Type C DIN 7971 Self-Tapping Screw Steel / Black (CR3)




## Self-Tapping Screws

## Slotted Countersunk

Steel / Zinc Plated (CR3) &amp; Steel / Black (CR3)

RoHS 2 Compliant

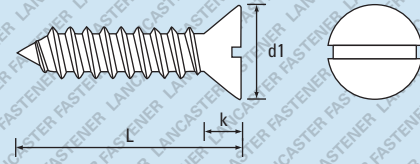

Further technical data is available on pages 234 - 236

## TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5	40,000   1,000   0.40	28,000   1,000   0.66						3/8	
13	35,000   1,000   0.54	22,000   1,000   0.71	16,000   1,000   1.17					1/2	
16	30,000   1,000   0.60	18,000   1,000   0.92	9,000   1,000   2.00					5/8	
19	25,000   1,000   0.71	16,000   1,000   1.13	16,000   1,000   1.40	12,000   1,000   1.60	8,000   1,000   2.24	3/4			
22									7/8
25	17,000   1,000   0.92	13,000   1,000   1.36	6,000   1,000   2.80					1	
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.  
 Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

## PRODUCT CODE EXAMPLE

LTABSLCSK48380ZC  
 LTABSLCSK35190ZN

## PRODUCT DESCRIPTION EXAMPLE

4.8 x 38.0 Slotted Countersunk Type C DIN 7972 Self-Tapping Screw Steel / Zinc Plated (CR3)  
 3.5 x 19.0 Slotted Countersunk Type C DIN 7972 Self-Tapping Screw Steel / Black (CR3)






# Self-Tapping Screws

## Slotted Raised Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

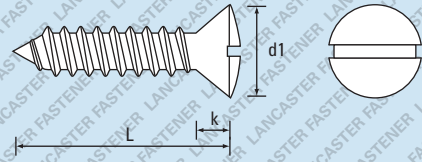

Further technical data is available on pages 234 - 236

### TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess
L - Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000							L - Length ins	
4.5									3/16
6.5									1/4
8									5/16
9.5	36,000   1,000   0.47								3/8
13	35,000   1,000   0.60	20,000   1,000   0.83			12,000   1,000   1.40	9,000   1,000   2.14		1/2	
16	30,000   1,000   0.64	20,000   1,000   1.03						5/8	
19	27,000   1,000   0.74	13,000   1,000   1.15			10,000   1,000   1.71	7,000   1,000   2.40		3/4	
22									7/8
25	20,000   1,000   1.08	12,000   1,000   1.40			8,500   1,000   2.22	6,300   1,000   3.00		1	
32		8,000   1,000   1.77			7,000   500   2.60	5,000   500   3.53		1 1/4	
38		7,000   1,000   2.05			5,000   500   3.00	4,500   500   4.00	3,000   500   5.44	1 1/2	
45									1 3/4
50					3,500   500   3.90				2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.  
Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

#### PRODUCT CODE EXAMPLE

LTABLSRSD29250ZC  
LTABLSRSD48380ZN

#### PRODUCT DESCRIPTION EXAMPLE

2.9 x 25.0 Slotted Raised Countersunk Type C DIN 7973 Self-Tapping Screw Steel / Zinc Plated (CR3)  
4.8 x 38.0 Slotted Raised Countersunk Type C DIN 7973 Self-Tapping Screw Steel / Black (CR3)




## Self-Tapping Screws

## Washer Hexagon

Steel / Zinc Plated (CR3) &amp; Steel / Black (CR3)

RoHS 2 Compliant

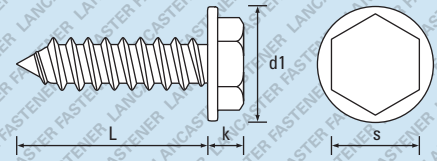

Further technical data is available on pages 234 - 236

## TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.5	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	6	8	10	12	14	Dia. Gauge
d1 - max	-	-	8.30	-	8.80	10.50	11.00	13.50	d1 - max
k - max	-	-	3.40	-	4.10	4.30	5.40	5.90	k - max
s - A/F max.	-	-	5.50	1/4"	7.00	8.00	8.00	10.00	s - A/F max.
Recess	-	-	-	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5									3/8
13									1/2
16									5/8
19									3/4
22									7/8
25									1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.  
 Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

## PRODUCT CODE EXAMPLE

LTABWHX55160ZC  
 LTABWHX63130ZN

## PRODUCT DESCRIPTION EXAMPLE

5.5 x 16.0 Washer Hexagon Type C DIN 6928 Self-Tapping Screw Steel / Zinc Plated (CR3)  
 6.3 x 13.0 Washer Hexagon Type C DIN 6928 Self-Tapping Screw Steel / Black (CR3)





# Self-Tapping Screws

Hexagon

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

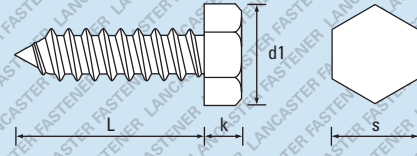

Further technical data is available on pages 234 - 236

## TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm		
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge		
d1 - max	-	-	-	-	-	-	-	-	d1 - max		
k - nom	1.30	1.50	2.30	2.30	2.80	3.00	4.00	4.80	k - nom		
s - A/F max	3.20	5.00	5.50	7.00	7.00	8.00	8.00	10.00	s - A/F max		
Recess	-	-	-	-	-	-	-	-	Recess		
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins		
4.5									3/16		
6.5									1/4		
8									5/16		
9.5			16,000   1,000   0.76			13,000   1,000   1.29	12,500   1,000   1.70		3/8		
13			16,000   1,000   0.92			12,000   1,000   1.54	9,000   1,000   2.02	6,000   1,000   2.72	4,500   500   4.25	1/2	
16						10,000   1,000   1.76	8,000   1,000   2.32	5,000   1,000   3.09	4,000   500   4.77	5/8	
19			13,000   1,000   1.23			8,000   1,000   1.97	7,000   1,000   2.61	5,000   1,000   3.48	3,700   500   5.30	3/4	
22										7/8	
25						7,000   1,000   2.45	6,000   1,000   3.19	4,800   500   4.25	3,000   500   6.35	1	
32								5,000   500   3.88	3,500   500   5.14	2,300   250   7.57	1 1/4
38								4,000   500   4.46	2,500   500   5.90	2,300   250   8.63	1 1/2
45									2,000   250   9.89		1 3/4
50								2,000   250   6.96	1,700   250   10.36		2
57											2 1/4
63											2 1/2
70											2 3/4
75											3

Zinc Plated (CR3) - preferred and available from stock.  
Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

### PRODUCT CODE EXAMPLE

LTABHEX63190ZC  
LTABHEX35130ZN

### PRODUCT DESCRIPTION EXAMPLE

6.3 x 19.0 Hexagon Type C DIN 7976 Self-Tapping Screw Steel / Zinc Plated (CR3)  
3.5 x 13.0 Hexagon Type C DIN 7976 Self-Tapping Screw Steel / Black (CR3)




## Self-Tapping Screws

## Cross Recess (Z) Pan

Steel / Zinc Plated (CR3) &amp; Steel / Black (CR3)

RoHS 2 Compliant

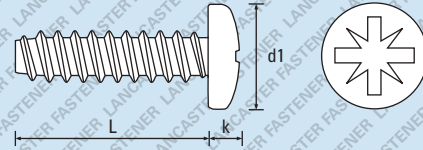

Further technical data is available on pages 234 - 236

## TYPE F blunt

Di. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Di. mm
Di. Gauge	2	4	6	7	8	10	12	14	Di. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
3.0	125,000   1,000   0.17								1/8
4.5	100,000   1,000   0.19	54,000   1,000   0.38	30,000   1,000   0.62						3/16
6.5	80,000   1,000   0.23	40,000   1,000   0.46	28,000   1,000   0.75	20,000   1,000   0.94	15,000   1,000   1.17	10,000   1,000   1.85			1/4
8	70,000   1,000   0.25	40,000   1,000   0.53	26,000   1,000   0.81		15,000   1,000   1.31	10,000   1,000   1.94			5/16
9.5	60,000   1,000   0.30	32,000   1,000   0.54	25,000   1,000   0.88	17,000   1,000   1.11	13,000   1,000   1.42	8,500   1,000   2.06			3/8
13	55,000   1,000   0.36	30,000   1,000   0.60	20,000   1,000   1.03	14,000   1,000   1.32	12,000   1,000   1.61	7,500   1,000   2.30	6,000   1,000   3.20	4,000   500   4.76	1/2
16		25,000   1,000   0.74	15,000   1,000   1.20	12,000   1,000   1.52	11,000   1,000   1.83	7,000   1,000   2.50	5,500   1,000   3.50		5/8
19		20,000   1,000   0.83	13,000   1,000   1.34	10,000   1,000   1.68	9,000   1,000   2.01	7,000   1,000   2.86	5,000   500   3.68		3/4
22			10,000   1,000   1.49			6,000   500   3.12			7/8
25		12,000   1,000   1.06	10,000   1,000   1.65		7,500   1,000   2.49	5,000   500   3.40	4,000   500   4.46		1
32		12,000   1,000   1.28	8,000   1,000   1.95		6,000   500   2.95	4,000   500   3.95			1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4

Zinc Plated (CR3) - preferred and available from stock.  
 Black (CR3) - non preferred and subject to a lead time  
 and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) -  
 preferred and available from stock.

See page 267  
 for further detail.

## PRODUCT CODE EXAMPLE

LTBZPAN22095ZC  
 LTBZPAN42065ZN

## PRODUCT DESCRIPTION EXAMPLE

2.2 x 9.5 Cross Recess (Z) Pan Type F DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)  
 4.2 x 6.5 Cross Recess (Z) Pan Type F DIN 7981 Self-Tapping Screw Steel / Black (CR3)

E. &amp; O. E.

© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.




# Self-Tapping Screws

## Cross Recess (Z) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

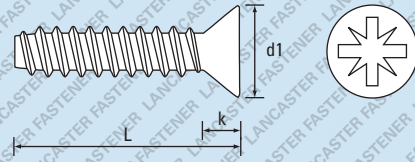

Further technical data is available on pages 234 - 236

### TYPE F blunt

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000							L- Length ins	
4.5	150,000   1,000   0.12								3/16
6.5	120,000   1,000   0.15	64,000   1,000   0.31	38,000   1,000   0.55						1/4
8	100,000   1,000   0.20	45,000   1,000   0.36	35,000   1,000   0.57						5/16
9.5	80,000   1,000   0.21	40,000   1,000   0.41	30,000   1,000   0.63		16,000   1,000   1.00				3/8
13	72,000   1,000   0.27	38,000   1,000   0.55	24,000   1,000   0.76		16,000   1,000   1.20	11,000   1,000   1.73			1/2
16		30,000   1,000   0.64	22,000   1,000   0.94		11,000   1,000   1.41	9,000   1,000   2.03			5/8
19			18,000   1,000   1.15		10,000   1,000   1.65	8,500   1,000   2.20			3/4
22									7/8
25			14,000   1,000   1.41		7,000   1,000   2.08	6,000   1,000   2.77			1
32					6,000   500   2.48		2,500   500   6.17		1 1/4
38							2,300   250   7.40		1 1/2
45							3,000   250   6.11	1,800   250   8.40	1 3/4
50							1,500   250   9.11		2
57							1,500   200   10.56		2 1/4
63							1,000   150   11.43		2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.  
Black (CR3) - non preferred and subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

#### PRODUCT CODE EXAMPLE

LTBZCSK35190ZC  
LTBZCSK29130ZN

#### PRODUCT DESCRIPTION EXAMPLE

3.5 x 19.0 Cross Recess (Z) Countersunk Type F DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)  
2.9 x 13.0 Cross Recess (Z) Countersunk Type F DIN 7982 Self-Tapping Screw Steel / Black (CR3)



LANCASTER


BS 4174

Cross Recess (Z) Flange

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

# Self-Tapping Screws

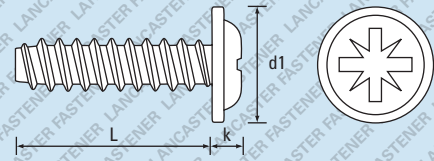

Carbon Steel Product Ranges

Stainless Steel Product Ranges

Brass Product Ranges

Technical Data

Further technical data is available on pages 234 - 236

## TYPE F blunt

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	6.53	8.15	8.90	9.75	11.38	13.00	14.55	d1 - max
k - max	-	1.60	1.88	2.00	2.36	2.90	3.15	3.68	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5	40,000   1,000   0.39	30,000   1,000   0.69			20,000   1,000   1.05			1/4	
8	28,000   1,000   0.70				17,000   1,000   1.20			5/16	
9.5	30,000   1,000   0.49	22,000   1,000   0.76			16,000   1,000   1.30	10,000   1,000   1.78			3/8
13					12,500   1,000   1.55	8,500   1,000   2.25			1/2
16					11,500   1,000   1.66	8,500   1,000   2.29			5/8
19					10,000   1,000   1.92			3/4	
22									7/8
25									1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.  
Black (CR3) - non preferred and subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

### PRODUCT CODE EXAMPLE

LTBZFLN42160ZC  
LTBZFLN35080ZN

### PRODUCT DESCRIPTION EXAMPLE

4.2 x 16.0 Cross Recess (Z) Flange Type F BS 4174 Self-Tapping Screw Steel / Zinc Plated (CR3)  
3.5 x 8.0 Cross Recess (Z) Flange Type F BS 4174 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.  
© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.




# Self-Tapping Screws

## T-Drive® (6-Lobe) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

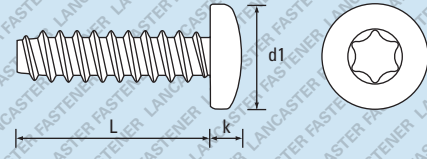

Further technical data is available on pages 234 - 236

### TYPE F blunt

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T8	T10	T15	T15	T20	T25	T25	T30	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000							L- Length ins	
4.5								3/16	
6.5	40,000   1,000   0.46	28,000   1,000   0.78	15,000   1,000   1.12					1/4	
8								5/16	
9.5	32,000   1,000   0.55	25,000   1,000   0.91	13,000   1,000   1.33	8,500   1,000   2.12				3/8	
13	20,000   1,000   1.08		12,000   1,000   1.88	7,500   1,000   1.64	6,000   1,000   3.19				1/2
16			11,000   1,000   2.43	7,000   1,000   2.72				5/8	
19								3/4	
22								7/8	
25								1	
32								1 1/4	
38								1 1/2	
45								1 3/4	
50								2	
57								2 1/4	
63								2 1/2	
70								2 3/4	
75								3	

Zinc Plated (CR3) - preferred and available from stock.  
Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

#### PRODUCT CODE EXAMPLE

LTBTXPAN55130ZC  
LTBTXPAN48160ZN

#### PRODUCT DESCRIPTION EXAMPLE

5.5 x 13.0 T-Drive® Pan Type F DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)  
4.8 x 16.0 T-Drive® Pan Type F DIN 7981 Self-Tapping Screw Steel / Black (CR3)

T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd.  
E. & O. E.  
© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.



LANCASTER



DIN 7976

Hexagon

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

RoHS 2 Compliant

# Self-Tapping Screws

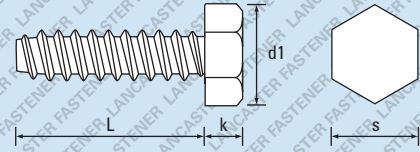

Further technical data is available on pages 234 - 236

## TYPE F blunt

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	-	-	-	-	-	-	d1 - max
k - nom	1.30	1.50	2.30	2.30	2.80	3.00	4.00	4.80	k - nom
s - A/F max	3.20	5.00	5.50	7.00	7.00	8.00	8.00	10.00	s - A/F max
Recess	-	-	-	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5						9,000   1,000   1.87			3/8
13						6,000   1,000   2.02	7,000   1,000   2.72	4,000   500   4.25	1/2
16								4,000   500   4.77	5/8
19							4,000   1,000   3.48		3/4
22									7/8
25									1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.  
Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 267 for further detail.

### PRODUCT CODE EXAMPLE

LTBHEX63160ZC  
LTBHEX48130ZN

### PRODUCT DESCRIPTION EXAMPLE

6.3 x 16.0 Hexagon Type F DIN 7976 Self-Tapping Screw Steel / Zinc Plated (CR3)  
4.8 x 13.0 Hexagon Type F DIN 7976 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.  
© 2021 Lancaster Fastener Co Ltd. All images are copyright protected.

Carbon Steel Product Ranges

Stainless Steel Product Ranges

Brass Product Ranges

Technical Data