



PROTECTOR

DIN 7981 SIMILAR


TAMPER PROOF

Self-Tapping Screws

Pin T-Drive® (6-Lobe) Button

A2 Stainless Steel

RoHS 2 Compliant

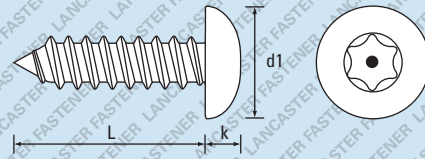

Also available in Steel / Zinc Plated - See page 98

Further technical data is available on page 244



PROTECTOR 4

| Dia. mm | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 | Dia. mm |
|--------------|---|-----|------|------|-----------------------|----------------------|-------|-------|---------------|
| Dia. Gauge | 2 | 4 | 6 | 7 | 8 | 10 | 12 | 14 | Dia. Gauge |
| d1 - max | - | - | 6.70 | 7.50 | 7.90 | 9.20 | 10.50 | 11.10 | d1 - max |
| k - max | - | - | 1.90 | - | 2.20 | 2.60 | 2.90 | 3.40 | k - max |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | - | - | T10 | - | T15 | T25 | T27 | T27 | Recess |
| L- Length mm | Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000 | | | | | | | | L- Length ins |
| 4.5 | | | | | | | | | 3/16 |
| 6.5 | | | | | | | | | 1/4 |
| 8 | | | | | | | | | 5/16 |
| 9.5 | | | | | | | | | 3/8 |
| 13 | | | | | | | | | 1/2 |
| 16 | | | | | | | | | 5/8 |
| 19 | | | | | 10,000 1,000 1.74 | | | | 3/4 |
| 22 | | | | | | | | | 7/8 |
| 25 | | | | | 8,000 1,000 2.16 | 5,000 1,000 3.08 | | | 1 |
| 32 | | | | | | 4,500 500 3.78 | | | 1 1/4 |
| 38 | | | | | | | | | 1 1/2 |
| 45 | | | | | | | | | 1 3/4 |
| 50 | | | | | | | | | 2 |
| 57 | | | | | | | | | 2 1/4 |
| 63 | | | | | | | | | 2 1/2 |
| 70 | | | | | | | | | 2 3/4 |
| 75 | | | | | | | | | 3 |

A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE

SSABPNTXBUT35095A2

PRODUCT DESCRIPTION EXAMPLE

3.5 x 9.5 Pin T-Drive® Button PROTECTOR 4 Type C DIN 7981 similar Self-Tapping Screw A2 Stainless Steel

T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd. E. & O. E.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.