


DIN 7500 Tap-Fix® Screws

Thread Rolling Screws for Metal Applications

Hexagon Socket Cap FORM E DIN 912 / EE ISO 4762

Steel / Zinc Plated (CR3)

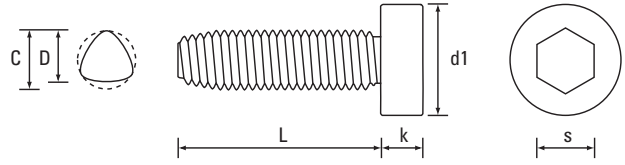

Di. D	-	-	-	M4	M5	M6	M8	M10	Di. D
Di. C max	-	-	-	4.08	5.09	6.10	8.13	10.15	Di. C max
d1 - max	-	-	-	7.00	8.50	10.00	13.00	16.00	d1 - max
k - max	-	-	-	4.00	5.00	6.00	8.00	10.00	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	3.00	4.00	5.00	6.00	8.00	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ttmwhexsckcapzc>

L - Length mm									L - Length mm
4									4
5									5
6									6
8				●	●				8
10				●	●	●			10
12				●	●	●			12
14									14
16				●	●	●	●		16
18									18
20				●	●	●	●		20
25				●	●	●	●		25
30					●	●	●		30
35						●			35
40						●	●		40
45									45
50						●	●		50
60									60

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

TTMWHXSCKCAP40012ZC

PRODUCT DESCRIPTION EXAMPLE

M4 x 12 Hexagon Socket Cap DIN 7500 FORM E DIN 912 / EE ISO 4762 Tap-Fix® Screw Steel / Zinc Plated (CR3)