


Cross Recess (H) Flange

Steel / Zinc Plated (CR3) & Steel / Black (CR3)



| Dia. D | 1.8 | 2.2 | 2.5 | 3 | 3.5 | 4 | 5 | 6 | Dia. D |
|------------|-----|------|------|------|------|------|-------|-------|------------|
| Dia. Gauge | - | - | - | - | - | - | - | - | Dia. Gauge |
| d1 - max | - | 4.40 | 5.00 | 6.00 | 7.00 | 8.00 | 10.00 | 12.00 | d1 - max |
| k | - | 1.60 | 1.80 | 2.10 | 2.40 | 2.50 | 3.20 | 4.00 | k |
| s - A/F | - | - | - | - | - | - | - | - | s - A/F |
| Recess | - | 1 | 1 | 1 | 2 | 2 | 2 | 3 | Recess |

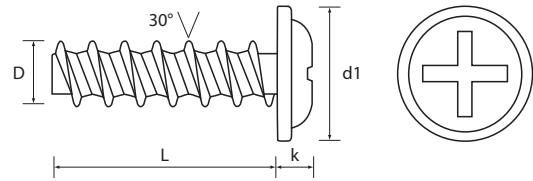

Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-psbphflnzc>

| L - Length mm | | | | | | | | | L - Length mm |
|---------------|--|---|---|-----|---|-----|---|---|---------------|
| 5 | | ● | ● | | | | | | 5 |
| 6 | | ● | | ● | | | | | 6 |
| 8 | | | ● | ● ● | ● | ● | | | 8 |
| 10 | | | ● | ● ● | ● | ● | | | 10 |
| 12 | | | ● | ● | ● | ● ● | | ● | 12 |
| 14 | | | | ● ● | ● | ● | ● | | 14 |
| 16 | | | | ● | ● | ● | ● | ● | 16 |
| 18 | | | | | | | ● | | 18 |
| 20 | | | | | ● | ● | | ● | 20 |
| 25 | | | | | ● | | | ● | 25 |
| 30 | | | | | | ● | | | 30 |
| 35 | | | | | | | | | 35 |
| 40 | | | | | | | | | 40 |
| - | | | | | | | | | - |
| - | | | | | | | | | - |
| - | | | | | | | | | - |
| - | | | | | | | | | - |

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

PSBPHFLN40008ZC
 PSBPHFLN30014ZN

PRODUCT DESCRIPTION EXAMPLE

4 x 8 Cross Recess (H) Flange Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
 3 x 14 Cross Recess (H) Flange Plas-Tech® 30° Screw Steel / Black (CR3)