


# Plas-Fix® 45° Screws


Thread Rolling Screws for Plastic Applications

T-Drive® (6-Lobe) Countersunk

A2 Stainless Steel

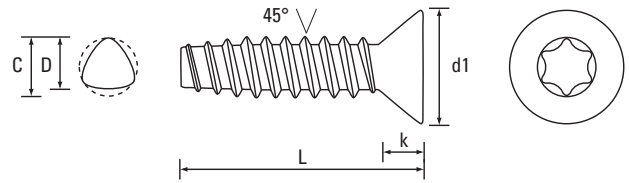

Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	-	-	2.55	3.05	3.55	4.06	5.06	-	Dia. C max
d1 - max	-	-	4.40	5.50	6.30	7.35	8.40	-	d1 - max
k - ref	-	-	1.30	1.50	1.65	1.90	2.20	-	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	T6	T8	T10	T15	T20	-	Recess

L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range  <a href="https://www.lancasterfastener.com/drawings-for-sspt45wtxcska2">https://www.lancasterfastener.com/drawings-for-sspt45wtxcska2</a></p>								L - Length mm
4									4
5									5
6				●	●				6
8				●	●				8
10				●	●	●			10
12				●	●	●			12
16				●	●	●			16
20				●	●	●			20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-
-									-

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE  
SSPT45WTXCSK30020A2

PRODUCT DESCRIPTION EXAMPLE  
3 x 20 T-Drive® (6-Lobe) Countersunk Plas-Fix® 45° Screw A2 Stainless Steel