


# Plas-Fix® 45° Screws


Thread Rolling Screws for Plastic Applications

Cross Recess (Z) Countersunk

A2 Stainless Steel

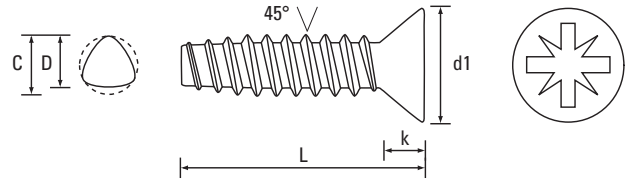

Di. D max	1.8	2.2	2.5	3	3.5	4	5	6	Di. D max
Di. C max	1.85	2.25	2.55	3.05	3.55	4.06	5.06	6.06	Di. C max
d1 - max	-	-	4.40	5.50	6.30	7.35	8.40	10.00	d1 - max
k - ref	-	-	1.30	1.50	1.65	1.90	2.20	2.50	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	1	2	2	2	Recess

L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range  <a href="https://www.lancasterfastener.com/drawings-for-sspt45wzcska2">https://www.lancasterfastener.com/drawings-for-sspt45wzcska2</a></p>								L - Length mm
4									4
5									5
6				●	●				6
8				●	●	●			8
10				●	●	●			10
12				●	●	●			12
16					●	●			16
20				●		●			20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-
-									-

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE  
SSPT45WZCSK40008A2

PRODUCT DESCRIPTION EXAMPLE  
4 x 8 Cross Recess (Z) Countersunk Plas-Fix® 45° Screw A2 Stainless Steel