


Self-Tapping Screws

Screws for Sheet Metal Applications

Pin T-Drive® (6-Lobe) Pan DIN 7981 SIMILAR Type C

Steel / Zinc Plated (CR3)

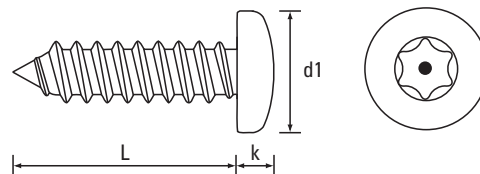

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T8	T10	T15	T15	T20	T25	T27	T30	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabpndrpanzc								L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5			●						3/8
13			●			●			1/2
16			●			●			5/8
19			●						3/4
22									7/8
25					●				1
32						●			1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
LTABPNDPAN48130ZC

PRODUCT DESCRIPTION EXAMPLE
4.8 x 13.0 Pin T-Drive® (6-Lobe) Pan DIN 7981 SIMILAR Type C Self-Tapping Screw Steel / Zinc Plated (CR3)