


Plas-Fix® 45° Screws

Thread Rolling Screws for Plastic Applications

T-Drive® (6-Lobe) Pan

A2 Stainless Steel

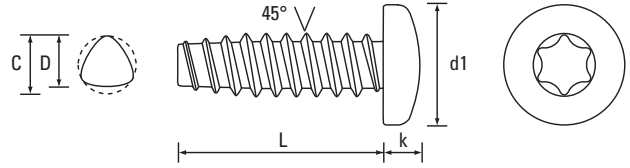

Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	-	-	2.55	3.05	3.55	4.06	5.06	-	Dia. C max
d1 - max	-	-	4.00	5.00	6.00	7.00	8.00	-	d1 - max
k - max	-	-	1.60	1.95	2.30	2.45	2.80	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	T6	T8	T10	T15	T20	-	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-sspt45wtxpana2>

L - Length mm									L - Length mm
4									4
5									5
6				●	●	●			6
8				●	●	●			8
10				●	●	●			10
12				●	●	●			12
16				●	●	●			16
20				●	●	●			20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-
-									-

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE	PRODUCT DESCRIPTION EXAMPLE
SSPT45WTXPAN40006A2	4 x 6 T-Drive® (6-Lobe) Pan Plas-Fix® 45° Screw A2 Stainless Steel