


T-Drive® (6-Lobe) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)



Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.00	4.20	5.60	6.90	7.50	8.20	10.80	d1 - max
k	-	1.50	1.60	2.10	2.30	2.60	2.90	3.80	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T6	T7	T10	T10	T20	T20	T25	Recess

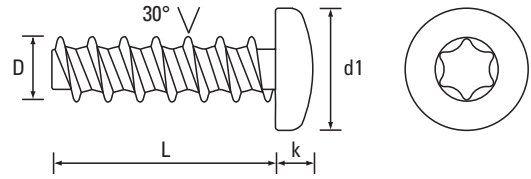

Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-psbptxpanzc>

L - Length mm									L - Length mm
5		●	●						5
6		●	●	● ●					6
8		●	●	● ●	●	● ●			8
10		●	●	● ●	● ●	● ●	● ●		10
12			●	● ●	● ●	● ●	● ●	●	12
14			●	● ●	● ●	● ●	●		14
16			●	● ●	● ●	● ●	● ●	● ●	16
18				●	● ●	●			18
20				● ●	●	● ●	● ●	● ●	20
25				● ●	●	● ●	● ●	● ●	25
30				● ●	●	● ●	●	●	30
35									35
40									40
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

PSBPTXPAN25006ZC
 PSBPTXPAN50010ZN

PRODUCT DESCRIPTION EXAMPLE

2.5 x 6 T-Drive® (6-Lobe) Pan Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
 5 x 10 T-Drive® (6-Lobe) Pan Plas-Tech® 30° Screw Steel / Black (CR3)