



TAP-FIX®


T-Drive® (6-Lobe) Pan

Thread Rolling Screws

Steel / Zinc Plated (CR3) & Lubricated & Steel / Black (CR3)

RoHS 2 Compliant

FOR METAL

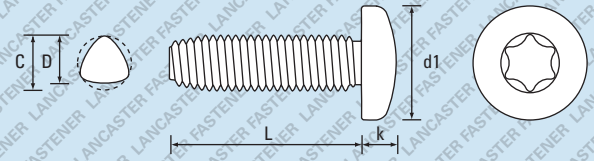

Further technical data is available on page 238

FORM PE ISO 14583

Table with columns for Dia. D max, Dia. C max, d1-max, k-max, s-A/F, Recess, L-Length mm, Bulk Carton Quantity, Small Box Quantity, Weight (KG) per 1,000, and L-Length mm. Rows include sizes M2, M2.5, M3, M3.5, M4, M5, M6, M8, 4, 5, 6, 7, 8, 10, 12, 14, 16, 18, 20, 25, 30, 35, 40, 45, 50.

Zinc Plated (CR3) - preferred and available from stock. Black (CR3) - non preferred and subject to a lead time and MOQ.

See page 287 for further detail.

PRODUCT CODE EXAMPLE

PRODUCT DESCRIPTION EXAMPLE

TTIWTXPAN40020ZC
TTIWTXPAN50016ZN

M4 x 20 T-Drive® Pan DIN 7500 FORM PE ISO 14583 Tap-Fix® Screw Steel / Zinc Plated (CR3)
M5 x 16 T-Drive® Pan DIN 7500 FORM PE ISO 14583 Tap-Fix® Screw Steel / Black (CR3)

Tap-Fix® and T-Drive® are registered trade marks of Lancaster Fastener Co Ltd. E. & O. E.

© 2021, Lancaster Fastener Co Ltd. All images are copyright protected.