


T-Drive® (6-Lobe) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)



Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	3.80	4.70	5.50	7.30	8.40	9.30	11.30	d1 - max
k - ref	-	1.30	1.75	2.05	2.80	3.25	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T6	T8	T8	T15	T20	T20	T30	Recess

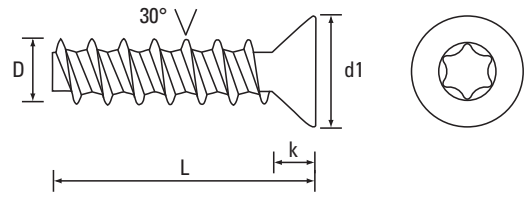

Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-psbptxcskzc>

L - Length mm									L - Length mm
5									5
6		●	●	●					6
8			●	● ●					8
10			●	● ●	● ●	● ●			10
12				● ●	● ●	● ●			12
14									14
16				● ●	●	● ●	●		16
18									18
20				● ●	●	●	● ●		20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

PSBPTXCCK30010ZC
 PSBPTXCCK40016ZN

PRODUCT DESCRIPTION EXAMPLE

3 x 10 T-Drive® (6-Lobe) Countersunk Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
 4 x 16 T-Drive® (6-Lobe) Countersunk Plas-Tech® 30° Screw Steel / Black (CR3)