



LANCASTER

DIN 7981


Self-Tapping Screws

Cross Recess (Z) Pan

Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant



All images are copyright protected

Further technical data is available on pages 186 -188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
4.5	115,000 1,000 0.16	50,000 1,000 0.33							3/16
6.5	86,000 1,000 0.20	45,000 1,000 0.39	28,000 1,000 0.66	19,000 1,000 0.92	16,000 1,000 1.14				1/4
8	80,000 1,000 0.24	40,000 1,000 0.46	24,000 1,000 0.75		15,000 1,000 1.20				5/16
9.5	70,000 1,000 0.26	30,000 1,000 0.50	24,000 1,000 0.83	18,000 1,000 1.05	14,000 1,000 1.28	10,000 1,000 1.78			3/8
13	55,000 1,000 0.33	28,000 1,000 0.61	18,000 1,000 1.00	15,000 1,000 1.27	13,000 1,000 1.53	7,500 1,000 2.11	7,000 1,000 3.03	4,500 500 4.82	1/2
16	35,000 1,000 0.39	25,000 1,000 0.72	15,000 1,000 1.17	13,000 1,000 1.46	11,000 1,000 1.78	7,000 1,000 2.43	6,000 1,000 3.47	3,500 500 5.41	5/8
19		20,000 1,000 0.84	13,000 1,000 1.35	12,000 1,000 1.65	10,000 1,000 2.04	7,000 1,000 2.76	4,500 500 3.91	3,500 500 5.99	3/4
22		20,000 1,000 0.95	13,000 1,000 1.51		9,000 1,000 2.29	6,500 1,000 3.08			7/8
25		15,000 1,000 1.06	10,000 1,000 1.68	9,500 1,000 2.03	8,000 1,000 2.55	5,000 500 3.41	4,000 500 4.79	3,000 500 7.16	1
32		10,000 1,000 1.28	8,000 1,000 2.02	7,500 1,000 2.38	6,000 500 3.05	4,500 500 4.06	3,500 500 5.67	2,500 250 8.33	1 1/4
38		7,000 1,000 1.52	7,000 1,000 2.36	5,000 1,000 2.73	5,000 500 3.56	3,000 500 4.71	3,000 500 6.55	2,000 250 9.50	1 1/2
45			4,500 500 2.70		3,500 500 4.07	3,000 500 5.36	2,500 250 7.43	1,700 250 10.66	1 3/4
50			3,000 500 3.04		2,500 500 4.58	2,000 250 6.01	2,000 250 8.31	1,200 250 11.82	2
57					2,500 250 4.65	2,000 250 6.08		1,000 200 12.10	2 1/4
63					2,300 250 4.93	1,500 250 6.65	1,500 200 9.05	1,000 200 12.60	2 1/2
70					2,000 250 5.50	1,000 250 7.40			2 3/4
75						1,000 200 8.61	1,000 200 11.83	750 200 14.60	3

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) preferred and available from stock.

See Page 219 for further detail.

PRODUCT CODE EXAMPLE

LTABZPAN42130ZC
LTABZPAN55250ZN

PRODUCT DESCRIPTION EXAMPLE

4.2 x 13.0 Cross Recess (Z) Pan Type C DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)
5.5 x 25.0 Cross Recess (Z) Pan Type C DIN 7981 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

t: +44 (0) 1524 389 232 f: +44 (0) 1524 66367 enquiries@lancasterfastener.co.uk www.lancasterfastener.com

1

SELF-TAPPING
SCREWS

SELF-DRILLING
SCREWS

TAP-FIX® THREAD
ROLLING SCREWS

ROLLED THREAD
MACHINE SCREWS

TAMPER PROOF
SECURITY SCREWS

HAMMER DRIVE
SCREWS

SCREWS FOR
PLASTICS

MICRO DIAMETER
SCREWS

K-SERIES®
SETZMUTTERN

RIVET BUSHES &
SELF-CLINCHING
FASTENERS

CD WELD STUDS

BRASS INSERTS
FOR PLASTICS


TECHNICAL DATA

**CASTLE®**

Low priced, bulk packed, commodity size ranges

DIN7981**Cross Recess (Z) Pan**
Steel / Zinc Plated (CR3)

RoHS 2 Compliant

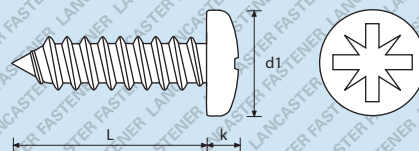

All images are copyright protected

Further technical data is available on pages 186 - 188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins	
4.5									3/16
6.5									1/4
8									5/16
9.5		30,000 N/A 0.50	24,000 N/A 0.83		14,000 N/A 1.28	10,000 N/A 1.78		3/8	
13		28,000 N/A 0.61	18,000 N/A 1.00		13,000 N/A 1.53	7,500 N/A 2.11		1/2	
16		25,000 N/A 0.72	15,000 N/A 1.17		11,000 N/A 1.78	7,000 N/A 2.43		5/8	
19		20,000 N/A 0.84	13,000 N/A 1.35		10,000 N/A 2.04	7,000 N/A 2.76		3/4	
22									7/8
25		15,000 N/A 1.06	10,000 N/A 1.68		8,000 N/A 2.55	5,000 N/A 3.41		1	
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

☐ Zinc Plated (CR3) - preferred and available from stock.
PRODUCT CODE EXAMPLE

STABZPAN35190ZC

PRODUCT DESCRIPTION EXAMPLE

3.5 x 19.0 Cross Recess (Z) Pan Type C DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)

CASTLE® is a registered trade mark of Lancaster Fastener Co Ltd

E. & O. E.

© 2018, Lancaster Fastener Co Ltd.



LANCASTER

DIN 7982

Self-Tapping Screws


Cross Recess (Z) Countersunk

Steel / Zinc Plated (CR3)
Steel / Black (CR3)

RoHS 2 Compliant



All images are copyright protected

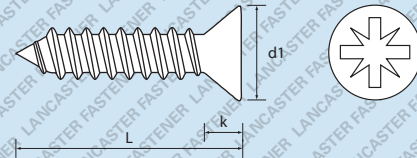

Further technical data is available on pages 186 -188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
4.5	145,000 1,000 0.10								3/16
6.5	120,000 1,000 0.14	65,000 1,000 0.29	42,000 1,000 0.47						1/4
8	110,000 1,000 0.17	55,000 1,000 0.37	39,000 1,000 0.56						5/16
9.5	90,000 1,000 0.20	40,000 1,000 0.40	28,000 1,000 0.64	25,000 1,000 0.66	17,000 1,000 0.99				3/8
13	75,000 1,000 0.27	35,000 1,000 0.51	22,000 1,000 0.81	21,000 1,000 0.88	16,000 1,000 1.25	11,000 1,000 1.67	10,000 1,000 2.30		1/2
16	60,000 1,000 0.33	30,000 1,000 0.63	18,000 1,000 0.98	18,000 1,000 1.07	12,000 1,000 1.50	9,000 1,000 1.99	8,000 1,000 2.74	5,500 500 3.41	5/8
19		25,000 1,000 0.74	16,000 1,000 1.15	16,000 1,000 1.26	12,000 1,000 1.65	8,000 1,000 2.31	6,000 1,000 3.18	4,500 500 4.35	3/4
22		20,000 1,000 0.85	13,000 1,000 1.33	12,000 1,000 1.45	11,000 1,000 2.01	7,000 1,000 2.64			7/8
25		19,000 1,000 0.96	13,000 1,000 1.50	10,000 1,000 1.64	9,000 1,000 2.26	6,000 1,000 2.97	5,000 500 4.06	3,800 500 5.52	1
32		15,000 1,000 1.18	10,000 1,000 1.84	8,000 1,000 2.10	5,000 1,000 2.77	5,500 500 3.62	4,000 500 4.94	3,000 250 6.69	1 1/4
38			7,500 1,000 2.18	7,500 1,000 2.41	4,000 500 3.28	4,000 500 4.27	3,300 500 5.82	2,500 250 7.85	1 1/2
45			5,500 500 2.52		4,000 500 3.79	3,000 500 4.92	2,000 250 6.70	2,200 250 9.03	1 3/4
50			3,500 500 2.86	5,000 500 3.18	3,000 500 4.00	2,500 250 5.57	2,000 250 7.40	1,500 250 10.21	2
57					2,700 250 4.30	2,000 250 5.64	2,000 250 7.60		2 1/4
63					2,300 250 4.63	2,000 250 6.00	1,500 200 8.20	1,000 200 11.00	2 1/2
70					1,500 250 4.88				2 3/4
75						1,500 200 8.17	1,000 200 11.10	1,000 200 13.40	3

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See Page 219 for further detail.

PRODUCT CODE EXAMPLE

LTABZCSK48160ZC
LTABZCSK29130ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 16.0 Cross Recess (Z) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)
2.9 x 13.0 Cross Recess (Z) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

t: +44 (0) 1524 389 232 f: +44 (0) 1524 66367 enquiries@lancasterfastener.co.uk www.lancasterfastener.com

3

SELF-TAPPING
SCREWS

SELF-DRILLING
SCREWS

TAP-FIX® THREAD
ROLLING SCREWS

ROLLED THREAD
MACHINE SCREWS

TAMPER PROOF
SECURITY SCREWS

HAMMER DRIVE
SCREWS

SCREWS FOR
PLASTICS

MICRO DIAMETER
SCREWS

K-SERIES®
SETZMUTTERN

RIVET BUSHES &
SELF-CLINCHING
FASTENERS

CD WELD STUDS

BRASS INSERTS
FOR PLASTICS

TECHNICAL DATA

**CASTLE®**

Low priced, bulk packed, commodity size ranges

Self-Tapping Screws



All images are copyright protected

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5		40,000 N/A 0.40	28,000 N/A 0.64						3/8
13		35,000 N/A 0.51	22,000 N/A 0.81		16,000 N/A 1.25	11,000 N/A 1.67		1/2	
16		30,000 N/A 0.63	18,000 N/A 0.98		12,000 N/A 1.50	9,000 N/A 1.99		5/8	
19		25,000 N/A 0.74	16,000 N/A 1.15		12,000 N/A 1.65	8,000 N/A 2.31		3/4	
22									7/8
25			13,000 N/A 1.50		9,000 N/A 2.26	6,000 N/A 2.97		1	
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

☐ Zinc Plated (CR3) - preferred and available from stock.
PRODUCT CODE EXAMPLE


STABZCSK42250ZC

PRODUCT DESCRIPTION EXAMPLE

4.2 x 25.0 Cross Recess (Z) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)

Cross Recess (Z) Countersunk Steel / Zinc Plated (CR3)

RoHS 2 Compliant



Further technical data is available on pages 186 -188

CASTLE® is a registered trade mark of Lancaster Fastener Co Ltd

E. & O. E.

© 2018, Lancaster Fastener Co Ltd. E. & O. E.



LANCASTER


BS 4174

Self-Tapping Screws

Cross Recess (Z) Flange

Steel / Zinc Plated (CR3)
Steel / Black (CR3)

RoHS 2 Compliant



All images are copyright protected

TYPE C pointed

Further technical data is available on pages 186 -188

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	6.53	8.15	8.90	9.75	11.38	13.00	14.55	d1 - max
k - max	-	1.60	1.88	2.00	2.36	2.90	3.15	3.68	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins	
4.5									3/16
6.5		48,000 1,000 0.39	31,000 1,000 0.66		19,000 1,000 1.02				1/4
8		40,000 1,000 0.48	28,000 1,000 0.75		17,000 1,000 1.11				5/16
9.5		35,000 1,000 0.50	26,000 1,000 0.83	19,500 1,000 0.92	15,000 1,000 1.28	10,000 1,000 1.78			3/8
13		30,000 1,000 0.61	20,000 1,000 1.00	15,500 1,000 1.21	12,000 1,000 1.53	9,000 1,000 2.11	6,000 1,000 3.03		1/2
16		25,000 1,000 0.72	15,000 1,000 1.17	13,500 1,000 1.28	11,000 1,000 1.68	7,000 1,000 2.43	5,500 500 3.47		5/8
19		21,000 1,000 0.84	13,000 1,000 1.35	10,500 1,000 1.45	11,000 1,000 1.79	6,000 1,000 2.76	5,000 500 3.91		3/4
22									7/8
25			10,000 1,000 1.68		7,000 1,000 2.55	5,000 500 3.41	4,500 500 4.79		1
32			8,000 1,000 2.02		5,000 500 3.05	3,500 500 4.06	3,500 500 5.67		1 1/4
38			6,000 1,000 2.36		4,500 500 3.56	3,500 500 4.71			1 1/2
45					3,500 500 4.07	2,500 250 5.36			1 3/4
50					2,500 500 4.58	2,500 250 6.01			2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock. See Page 219 for further detail.

PRODUCT CODE EXAMPLE

LTABZFLN55320ZC
LTABZFLN42160ZN

PRODUCT DESCRIPTION EXAMPLE

5.5 x 32.0 Cross Recess (Z) Flange Type C BS4174 Self-Tapping Screw Steel / Zinc Plated (CR3)
4.2 x 16.0 Cross Recess (Z) Flange Type C BS4174 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

t: +44 (0) 1524 389 232 f: +44 (0) 1524 66367 enquiries@lancasterfastener.co.uk www.lancasterfastener.com

5

SELF-TAPPING
SCREWS

SELF-DRILLING
SCREWS

TAP-FIX® THREAD
ROLLING SCREWS

ROLLED THREAD
MACHINE SCREWS

TAMPER PROOF
SECURITY SCREWS

HAMMER DRIVE
SCREWS

SCREWS FOR
PLASTICS

MICRO DIAMETER
SCREWS

K-SERIES®
SETZMUTTERN

RIVET BUSHES &
SELF-CLINCHING
FASTENERS

CD WELD STUDS

BRASS INSERTS
FOR PLASTICS

TECHNICAL DATA

**CASTLE®**

Low priced, bulk packed, commodity size ranges


Self-Tapping Screws



All images are copyright protected

BS 4174**Cross Recess (Z) Flange
Steel / Zinc Plated (CR3)**

RoHS 2 Compliant

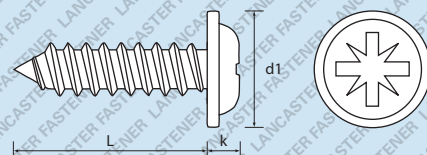

Further technical data is available on pages 186 - 188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	6.53	8.15	8.90	9.75	11.38	13.00	14.55	d1 - max
k - max	-	1.60	1.88	2.00	2.36	2.90	3.15	3.68	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins	
4.5									3/16
6.5									1/4
8									5/16
9.5		35,000 N/A 0.50	26,000 N/A 0.83		15,000 N/A 1.28	10,000 N/A 1.78			3/8
13		30,000 N/A 0.61	20,000 N/A 1.00		12,000 N/A 1.53	9,000 N/A 2.11			1/2
16		25,000 N/A 0.72	15,000 N/A 1.17		11,000 N/A 1.78	7,000 N/A 2.43			5/8
19		21,000 N/A 0.84	13,000 N/A 1.35		11,000 N/A 2.04	6,000 N/A 2.76			3/4
22									7/8
25			10,000 N/A 1.68		7,000 N/A 2.55	5,000 N/A 3.41			1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

☐ Zinc Plated (CR3) - preferred and available from stock.
PRODUCT CODE EXAMPLE

STABZFLN42250ZC

PRODUCT DESCRIPTION EXAMPLE

4.2 x 25.0 Cross Recess (Z) Flange Type C BS4174 Self-Tapping Screw Steel / Zinc Plated (CR3)

CASTLE® is a registered trade mark of Lancaster Fastener Co Ltd

E. & O. E.

© 2018, Lancaster Fastener Co Ltd.



LANCASTER

DIN 7983

Self-Tapping Screws

Cross Recess (Z) Raised Countersunk


Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant



All images are copyright protected

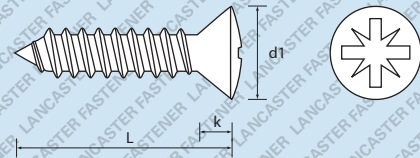

Further technical data is available on pages 186 -188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins	
4.5									3/16
6.5									1/4
8									5/16
9.5		40,000 1,000 0.46	32,000 1,000 0.76						3/8
13		35,000 1,000 0.58	20,000 1,000 0.93	18,000 1,000 1.11	14,000 1,000 1.44	9,500 1,000 1.64			1/2
16		30,000 1,000 0.69	20,000 1,000 1.10	15,000 1,000 1.30	12,000 1,000 1.69	9,000 1,000 2.30			5/8
19		27,000 1,000 0.80	13,000 1,000 1.27	12,000 1,000 1.49	10,000 1,000 1.95	7,000 1,000 2.62	5,000 1,000 3.63		3/4
22			13,000 1,000 1.44	10,000 1,000 1.63	10,000 1,000 2.20	7,000 1,000 2.94			7/8
25		20,000 1,000 1.03	12,000 1,000 1.61	10,000 1,000 1.87	8,500 1,000 2.45	6,300 1,000 3.27			1
32			8,000 1,000 1.95	6,500 1,000 2.25	7,000 500 2.96	5,000 500 3.92	4,000 500 5.39		1 1/4
38			7,000 1,000 2.30		5,000 500 3.47	4,500 500 4.57	3,000 500 6.27		1 1/2
45					5,000 500 3.87	3,500 500 5.23			1 3/4
50					3,500 500 3.98	2,500 250 5.55	2,400 250 7.28		2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3) preferred and available from stock.

See Page 219 for further detail.

PRODUCT CODE EXAMPLE

LTABZRSD55130ZC
LTABZRSD35320ZN

PRODUCT DESCRIPTION EXAMPLE

5.5 x 13.0 Cross Recess (Z) Raised Countersunk Type C DIN 7983 Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 32.0 Cross Recess (Z) Raised Countersunk Type C DIN 7983 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

t: +44 (0) 1524 389 232 f: +44 (0) 1524 66367 enquiries@lancasterfastener.co.uk www.lancasterfastener.com

7

SELF-TAPPING
SCREWS

SELF-DRILLING
SCREWS

TAP-FIX® THREAD
ROLLING SCREWS

ROLLED THREAD
MACHINE SCREWS

TAMPER PROOF
SECURITY SCREWS

HAMMER DRIVE
SCREWS

SCREWS FOR
PLASTICS

MICRO DIAMETER
SCREWS

K-SERIES®
SETZMUTTERN

RIVET BUSHES &
SELF-CLINCHING
FASTENERS

CD WELD STUDS

BRASS INSERTS
FOR PLASTICS

TECHNICAL DATA



LANCASTER

Self-Tapping Screws

WITH EARTHING NIBS



All images are copyright protected


Earthing Nibs

Cross Recess (Z) Washer Pan

Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant



TYPE C pointed

Further technical data is available on pages 186 -188

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	8.50	-	8.50	-	-	-	d1 - max
d2 - ref	-	-	7.00	-	7.00	-	-	-	d2 - ref
k - max	-	-	2.60	-	2.60	-	-	-	k - max
Recess	-	-	2	-	2	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5			18,000 1,000 1.07		16,000 1,000 1.19				3/8
13			13,000 1,000 1.25		14,000 1,000 1.39				1/2
16									5/8
19									3/4
22									7/8
25									1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3)
preferred and available from stock.

See Page 219
for further detail.

PRODUCT CODE EXAMPLE

ENABZWPN42130ZC
ENABZWPN35095ZN

PRODUCT DESCRIPTION EXAMPLE

4.2 x 13.0 Cross Recess (Z) Washer Pan With Earthing Nibs Type C Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 9.5 Cross Recess (Z) Washer Pan With Earthing Nibs Type C Self-Tapping Screw Steel / Black (CR3)



LANCASTER

DIN 7981


Self-Tapping Screws

Cross Recess (H) Pan

Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant

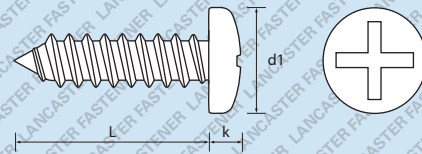

All images are copyright protected

Further technical data is available on pages 186 -188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
4.5	115,000 1,000 0.21								3/16
6.5	86,000 1,000 0.23	45,000 1,000 0.44	28,000 1,000 0.70	19,000 1,000 0.92	16,000 1,000 1.09				1/4
8									5/16
9.5	70,000 1,000 0.30	30,000 1,000 0.50	24,000 1,000 0.83	18,000 1,000 1.05	14,000 1,000 1.28	10,000 1,000 1.78			3/8
13	55,000 1,000 0.36	28,000 1,000 0.61	18,000 1,000 1.00	15,000 1,000 1.27	13,000 1,000 1.53	7,500 1,000 2.11	7,000 1,000 3.03	4,500 500 4.82	1/2
16	35,000 1,000 0.40	25,000 1,000 0.72	15,000 1,000 1.17	13,000 1,000 1.44	11,000 1,000 1.72	7,000 1,000 2.43	6,000 1,000 3.47	3,500 500 5.41	5/8
19		20,000 1,000 0.84	13,000 1,000 1.35	12,000 1,000 1.65	10,000 1,000 2.04	7,000 1,000 2.76	4,500 500 3.91	3,500 500 5.99	3/4
22		20,000 1,000 0.95	13,000 1,000 1.51	11,000 1,000 1.84	9,000 1,000 2.29	6,500 1,000 3.08	4,000 500 4.35	3,000 500 6.53	7/8
25		15,000 1,000 1.06	10,000 1,000 1.68	9,500 1,000 2.03	8,000 1,000 2.55	5,000 1,000 3.41	4,000 500 4.85	3,000 500 7.16	1
32		10,000 1,000 1.28	8,000 1,000 2.02	7,500 1,000 2.30	6,000 500 3.05	4,500 500 4.06	3,500 500 5.67	2,500 250 8.33	1 1/4
38		7,000 1,000 1.42	7,000 1,000 2.36	5,000 1,000 2.65	5,000 500 3.56	3,000 500 4.71	3,000 500 6.55	2,000 250 9.50	1 1/2
45				3,000 500 3.01	3,500 500 4.07	3,000 500 5.36	2,500 250 7.43	1,700 250 10.66	1 3/4
50			3,000 500 3.04		2,500 500 4.52	2,000 250 6.01	2,000 250 8.31	1,200 250 11.82	2
57									2 1/4
63								1,000 200 12.60	2 1/2
70									2 3/4
75									3
80								750 250 15.31	3 1/4

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ (2.9mm and above)

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock. See Page 219 for further detail.

PRODUCT CODE EXAMPLE

STABHPAN35130ZC
STABHPAN42190ZN

PRODUCT DESCRIPTION EXAMPLE

3.5 x 13.0 Cross Recess (H) Pan Type C DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)
4.2 x 19.0 Cross Recess (H) Pan Type C DIN 7981 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

t: +44 (0) 1524 389 232 f: +44 (0) 1524 66367 enquiries@lancasterfastener.co.uk www.lancasterfastener.com

9

SELF-TAPPING
SCREWS

SELF-DRILLING
SCREWS

TAP-FIX® THREAD
ROLLING SCREWS

ROLLED THREAD
MACHINE SCREWS

TAMPER PROOF
SECURITY SCREWS

HAMMER DRIVE
SCREWS

SCREWS FOR
PLASTICS

MICRO DIAMETER
SCREWS

K-SERIES®
SETZMUTTERN

RIVET BUSHES &
SELF-CLINCHING
FASTENERS

CD WELD STUDS

BRASS INSERTS
FOR PLASTICS

TECHNICAL DATA



LANCASTER

DIN 7982


Self-Tapping Screws

Cross Recess (H) Countersunk

Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant



All images are copyright protected

Further technical data is available on pages 186 - 188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins	
4.5								3/16	
6.5	120,000 1,000 0.18	65,000 1,000 0.31						1/4	
8								5/16	
9.5	90,000 1,000 0.23	40,000 1,000 0.40	28,000 1,000 0.61	25,000 1,000 0.66	17,000 1,000 0.99			3/8	
13	75,000 1,000 0.27	35,000 1,000 0.51	22,000 1,000 0.81	21,000 1,000 0.88	16,000 1,000 1.25	11,000 1,000 1.67	10,000 1,000 2.30	1/2	
16	30,000 1,000 0.63		18,000 1,000 0.98	18,000 1,000 1.07	12,000 1,000 1.50	9,000 1,000 1.99	8,000 1,000 2.74	5/8	
19	25,000 1,000 0.74		16,000 1,000 1.15	16,000 1,000 1.34	12,000 1,000 1.76	8,000 1,000 2.31	6,000 1,000 3.18	4,500 500 4.35	3/4
22			13,000 1,000 1.33	12,000 1,000 1.45	11,000 1,000 2.01	7,000 1,000 2.64			7/8
25	19,000 1,000 0.96		13,000 1,000 1.50	10,000 1,000 1.64	9,000 1,000 2.26	6,000 1,000 2.97	5,000 500 4.06	3,800 500 5.52	1
32			10,000 1,000 1.84	8,000 1,000 2.10	5,000 1,000 2.77	5,500 500 3.62	4,000 500 4.94	3,000 250 6.69	1 1/4
38				7,500 1,000 2.41	4,000 500 3.28	4,000 500 4.27	3,300 500 5.82	3,000 250 7.85	1 1/2
45						3,000 500 4.92	2,000 250 6.70	1 3/4	
50					3,000 500 4.30	2,500 250 5.57	2,000 250 7.58	1,500 250 10.21	2
57								2 1/4	
63						2,000 250 6.07			2 1/2
70						1,200 250 6.45			2 3/4
75								3	

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and may be subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) preferred and available from stock.

See Page 219 for further detail.

PRODUCT CODE EXAMPLE

STABHCSK42160ZC
STABHCSK35130ZN

PRODUCT DESCRIPTION EXAMPLE

4.2 x 16.0 Cross Recess (H) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 13.0 Cross Recess (H) Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

10

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com



LANCASTER

DIN 7981


Self-Tapping Screws

T-Drive® (6-Lobe) Pan

Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant

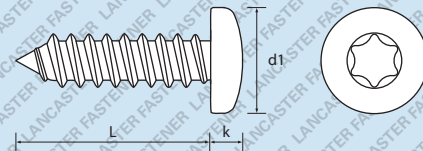

All images are copyright protected

Further technical data is available on pages 186 -188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T8	T10	T15	T15	T20	T25	T25	T30	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5	86,000 1,000 0.23	45,000 1,000 0.41	28,000 1,000 0.71	16,000 1,000 1.12					1/4
8	40,000 1,000 0.49		24,000 1,000 0.75						5/16
9.5	30,000 1,000 0.50	24,000 1,000 0.88	18,000 1,000 1.20	14,000 1,000 1.33	10,000 1,000 1.98				3/8
13	28,000 1,000 0.62	18,000 1,000 1.00	15,000 1,000 1.35	13,000 1,000 1.53	7,500 1,000 2.20	7,000 1,000 3.19			1/2
16	25,000 1,000 0.78	15,000 1,000 1.20	13,000 1,000 1.55	11,000 1,000 1.70	7,000 1,000 2.40	6,000 500 3.54	3,500 500 5.09		5/8
19	20,000 1,000 0.85	13,000 1,000 1.30	12,000 1,000 1.75	10,000 1,000 1.88	7,000 1,000 2.76	4,500 500 3.95	3,500 500 5.60		3/4
22	13,000 1,000 1.46		11,000 1,000 1.95	9,000 1,000 2.20	6,500 1,000 3.03				7/8
25	15,000 1,000 1.07	10,000 1,000 1.60	9,500 1,000 2.16	8,000 1,000 2.40	5,000 1,000 3.30	4,000 500 4.67	3,000 500 6.62		1
32	10,000 1,000 1.31	8,000 1,000 1.88	7,500 1,000 2.58	6,000 500 2.80	4,500 500 4.00			2,500 250 8.33	1 1/4
38			7,000 1,000 2.27	5,000 500 2.84	5,000 500 3.20	3,000 500 4.20			1 1/2
45						3,000 250 4.40			1 3/4
50						2,500 250 4.00	2,000 250 5.65	2	
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) preferred and available from stock. See Page 219 for further detail.

PRODUCT CODE EXAMPLE

LTABTXPAN48190ZC
LTABTXPAN35160ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 19.0 T-Drive® Pan Type C DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 16.0 T-Drive® Pan Type C DIN 7981 Self-Tapping Screw Steel / Black (CR3)

T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd.
E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com

11

TECHNICAL DATA

BRASS INSERTS FOR PLASTICS

RIVET BUSHES & SELF-CLINCHING FASTENERS

K-SERIES® SETZMUTTERN

MICRO DIAMETER SCREWS

SCREWS FOR PLASTICS

HAMMER DRIVE SCREWS

TAMPER PROOF SECURITY SCREWS

ROLLED THREAD MACHINE SCREWS

TAP-FIX® THREAD ROLLING SCREWS

SELF-DRILLING SCREWS

SELF-TAPPING SCREWS



LANCASTER

DIN 7982


Self-Tapping Screws

T-Drive® (6-Lobe) Countersunk

Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant



All images are copyright protected

Further technical data is available on pages 186 - 188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm	
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge	
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max	
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref	
s - A/F	-	-	-	-	-	-	-	-	s - A/F	
Recess	-	T8	T10	T15	T20	T25	T25	T30	Recess	
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins	
4.5									3/16	
6.5	65,000 1,000 0.32								1/4	
8			39,000 1,000 0.56					5/16		
9.5	40,000 1,000 0.42		28,000 1,000 0.60			17,000 1,000 0.99			3/8	
13	35,000 1,000 0.51		22,000 1,000 0.80	21,000 1,000 0.96	16,000 1,000 1.09	11,000 1,000 1.60			1/2	
16	30,000 1,000 0.63		18,000 1,000 0.90			12,000 1,000 1.32	9,000 1,000 1.80			5/8
19	25,000 1,000 0.67		16,000 1,000 1.03			12,000 1,000 1.53	8,000 1,000 2.00			3/4
22									7/8	
25			13,000 1,000 1.40			9,000 1,000 1.97	6,000 1,000 2.60			1
32					5,000 1,000 2.38	5,500 500 3.19			3,000 500 6.09	1 1/4
38					4,000 500 2.80	4,000 500 3.78			2,500 250 6.93	1 1/2
45									1 3/4	
50							1,500 250 8.93		2	
57									2 1/4	
63									2 1/2	
70									2 3/4	
75									3	

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3)
preferred and available from stock.

See Page 219
for further detail.

PRODUCT CODE EXAMPLE

LTABTXCSK48380ZC
LTABTXCSK29130ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 38.0 T-Drive® Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)
2.9 x 13.0 T-Drive® Countersunk Type C DIN 7982 Self-Tapping Screw Steel / Black (CR3)

T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd.

E. & O. E.

© 2018, Lancaster Fastener Co Ltd.

12

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com



LANCASTER


DIN7971

Self-Tapping Screws

Slotted Pan

**Steel / Zinc Plated (CR3)
Steel / Black (CR3)**

RoHS 2 Compliant



All images are copyright protected

Further technical data is available on pages 186 -188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm	
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge	
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max	
k - max	1.35	1.75	2.10	2.25	2.45	2.80	3.20	3.65	k - max	
s - A/F	-	-	-	-	-	-	-	-	s - A/F	
Recess	-	-	-	-	-	-	-	-	Recess	
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins		
4.5									3/16	
6.5	86,000 1,000 0.21	45,000 1,000 0.38	28,000 1,000 0.62					1/4		
8	40,000 1,000 0.44								5/16	
9.5	70,000 1,000 0.27	30,000 1,000 0.49	24,000 1,000 0.74	18,000 1,000 0.98	14,000 1,000 1.19	10,000 1,000 1.77	3/8			
13	28,000 1,000 0.58	18,000 1,000 0.93			13,000 1,000 1.36	7,500 1,000 1.94	7,000 1,000 2.79	1/2		
16	25,000 1,000 0.67	15,000 1,000 1.09	13,000 1,000 1.39	11,000 1,000 1.61	7,000 1,000 2.32	6,000 1,000 3.12	3,500 500 4.19	5/8		
19	20,000 1,000 0.78	13,000 1,000 1.22	12,000 1,000 1.54	10,000 1,000 1.92	7,000 1,000 2.52	4,500 1,000 3.50	3,500 500 4.85	3/4		
22								7/8		
25	15,000 1,000 0.94	10,000 1,000 1.53	9,500 1,000 1.83	8,000 1,000 2.17	5,000 1,000 3.04	4,000 500 4.24	3,000 500 6.00	1		
32			8,000 1,000 1.96	7,500 1,000 2.25	6,000 500 2.64	4,500 500 3.67	3,500 500 5.13	2,500 250 6.87	1 1/4	
38					5,000 500 3.12				2,000 250 7.80	1 1/2
45								13/4		
50					2,500 500 4.07				1,200 250 10.14	2
57								2 1/4		
63								2 1/2		
70								2 3/4		
75								3		

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ (2.9mm and above).

See Page 219 for further details.

PRODUCT CODE EXAMPLE

LTABSLPAN63500ZC
LTABSLPAN35250ZN

PRODUCT DESCRIPTION EXAMPLE

6.3 x 50.0 Slotted Pan Type C DIN 7971 Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 25.0 Slotted Pan Type C DIN 7971 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

t: +44 (0) 1524 389 232 f: +44 (0) 1524 66367 enquiries@lancasterfastener.co.uk www.lancasterfastener.com 13

SELF-TAPPING SCREWS
SELF-DRILLING SCREWS
TAP-FIX® THREAD ROLLING SCREWS
ROLLED THREAD MACHINE SCREWS
TAMPER PROOF SECURITY SCREWS
HAMMER DRIVE SCREWS
SCREWS FOR PLASTICS
MICRO DIAMETER SCREWS
K-SERIES® SETZMUTTERN
RIVET BUSHES & SELF-CLINCHING FASTENERS
CD WELD STUDS
BRASS INSERTS FOR PLASTICS
TECHNICAL DATA



LANCASTER

DIN7972

Self-Tapping Screws

Slotted Countersunk


Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant



All images are copyright protected

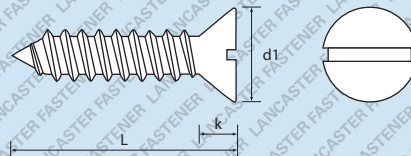

Further technical data is available on pages 186 -188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5		40,000 1,000 0.40	28,000 1,000 0.66						3/8
13		35,000 1,000 0.54	22,000 1,000 0.71		16,000 1,000 1.17				1/2
16		30,000 1,000 0.60	18,000 1,000 0.92			9,000 1,000 2.00			5/8
19		25,000 1,000 0.71	16,000 1,000 1.13	16,000 1,000 1.40	12,000 1,000 1.60	8,000 1,000 2.24			3/4
22									7/8
25		18,000 1,000 0.92	13,000 1,000 1.36		9,000 1,000 2.00	6,000 1,000 2.80			1
32			10,000 1,000 1.77		5,000 1,000 2.47				1 1/4
38			7,500 1,000 2.06		4,000 500 2.97	4,000 500 4.00	3,300 500 5.10		1 1/2
45									1 3/4
50					3,000 500 3.68				2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ.

See Page 219
for further detail.

PRODUCT CODE EXAMPLE

LTABSLCSK48380ZC
LTABSLCSK35190ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 38.0 Slotted Countersunk Type C DIN 7972 Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 19.0 Slotted Countersunk Type C DIN 7972 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

14

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com



LANCASTER

DIN7973


Self-Tapping Screws

Slotted Raised Countersunk

Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant

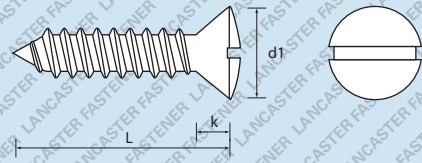

All images are copyright protected

Further technical data is available on pages 186 -188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins	
4.5									3/16
6.5									1/4
8									5/16
9.5		36,000 1,000 0.47							3/8
13		35,000 1,000 0.60	20,000 1,000 0.83			9,500 1,000 1.83			1/2
16		30,000 1,000 0.64	20,000 1,000 1.03		12,000 1,000 1.40	9,000 1,000 2.14			5/8
19		27,000 1,000 0.74	13,000 1,000 1.15		10,000 1,000 1.71	7,000 1,000 2.40			3/4
22									7/8
25		20,000 1,000 1.08	12,000 1,000 1.40		8,500 1,000 2.22	6,300 1,000 3.00			1
32			8,000 1,000 1.77		7,000 500 2.60	5,000 500 3.53			1 1/4
38			7,000 1,000 2.05		5,000 500 3.00	4,500 500 4.00	3,000 500 5.44		1 1/2
45						3,500 500 4.52			1 3/4
50					3,500 500 3.90				2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ.

See Page 219 for further details.

PRODUCT CODE EXAMPLE

LTABSLRSD29250ZC
LTABSLRSD48500ZN

PRODUCT DESCRIPTION EXAMPLE

2.9 x 25.0 Slotted Raised Countersunk Type C DIN 7973 Self-Tapping Screw Steel / Zinc Plated (CR3)
4.8 x 50.0 Slotted Raised Countersunk Type C DIN 7973 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

t: +44 (0) 1524 389 232 f: +44 (0) 1524 66367 enquiries@lancasterfastener.co.uk www.lancasterfastener.com 15

SELF-TAPPING
SCREWS

SELF-DRILLING
SCREWS

TAP-FIX® THREAD
ROLLING SCREWS

ROLLED THREAD
MACHINE SCREWS

TAMPER PROOF
SECURITY SCREWS

HAMMER DRIVE
SCREWS

SCREWS FOR
PLASTICS

MICRO DIAMETER
SCREWS

K-SERIES®
SETZMUTTERN

RIVET BUSHES &
SELF-CLINCHING
FASTENERS

CD WELD STUDS

BRASS INSERTS
FOR PLASTICS

TECHNICAL DATA



LANCASTER

Self-Tapping Screws



All images are copyright protected


DIN 6928

Washer Hexagon

Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant

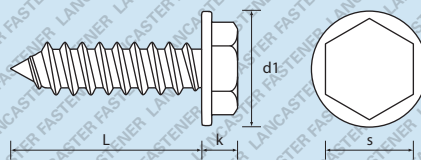

Further technical data is available on pages 186 -188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.5	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	6	8	10	12	14	Dia. Gauge
d1 - max	-	-	8.30	-	8.80	10.50	11.00	13.20	d1 - max
k - max	-	-	3.40	-	4.10	4.30	5.40	5.90	k - max
s - A/F max.	-	-	5.50	1/4"	7.00	8.00	8.00	10.00	s - A/F max.
Recess	-	-	-	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins	
4.5									3/16
6.5									1/4
8									5/16
9.5				18,000 1,000 1.10	11,000 1,000 1.68				3/8
13				15,000 1,000 1.19	10,000 1,000 1.81	7,500 1,000 2.62	6,000 1,000 3.35	3,800 500 5.05	1/2
16					8,000 1,000 2.20	6,500 1,000 2.90	5,000 1,000 3.61	3,500 500 5.73	5/8
19			12,000 1,000 1.40		7,000 1,000 2.25	6,000 1,000 3.02	4,000 500 3.97	3,000 500 6.30	3/4
22									7/8
25					6,000 1,000 2.81	4,000 500 3.86	4,000 500 4.66	2,600 250 7.50	1
32								2,500 250 8.00	1 1/4
38								1,700 250 9.40	1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ.

See Page 219
for further detail.

PRODUCT CODE EXAMPLE

LTABWHX55160ZC

LTABWHX63130ZN

PRODUCT DESCRIPTION EXAMPLE

5.5 x 16.0 Washer Hexagon Type C DIN 6928 Self-Tapping Screw Steel / Zinc Plated (CR3)

6.3 x 13.0 Washer Hexagon Type C DIN 6928 Self-Tapping Screw Steel / Black (CR3)



LANCASTER


DIN7976

Self-Tapping Screws

Hexagon

Steel / Zinc Plated (CR3)
Steel / Black (CR3)

RoHS 2 Compliant



All images are copyright protected

TYPE C pointed

Further technical data is available on pages 186 -188

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm	
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge	
d1 - max	-	-	-	-	-	-	-	-	d1 - max	
k - nom	1.30	1.50	2.30	2.30	2.80	3.00	4.00	4.80	k - nom	
s - A/F max	3.20	5.00	5.50	7.00	7.00	8.00	8.00	10.00	s - A/F max	
Recess	-	-	-	-	-	-	-	-	Recess	
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins		
4.5								3/16		
6.5								1/4		
8								5/16		
9.5			16,000 1,000 0.76			13,000 1,000 1.29	12,500 1,000 1.70	3/8		
13			16,000 1,000 0.92			12,000 1,000 1.54	9,000 1,000 2.02	6,000 1,000 2.72	4,500 500 4.25	1/2
16						10,000 1,000 1.76	8,000 1,000 2.32	5,000 1,000 3.09	4,000 500 4.77	5/8
19			13,000 1,000 1.23			8,000 1,000 1.97	7,000 1,000 2.61	5,000 1,000 3.48	3,700 500 5.30	3/4
22								7/8		
25						7,000 1,000 2.45	6,000 1,000 3.19	4,800 500 4.25	3,000 500 6.35	1
32							5,000 500 3.88	3,500 500 5.14	2,300 250 7.57	1 1/4
38							4,000 500 4.46	2,500 500 5.90	2,300 250 8.63	1 1/2
45									2,000 250 9.89	1 3/4
50								2,000 250 6.96	1,700 250 10.36	2
57								2 1/4		
63								2 1/2		
70								2 3/4		
75								3		

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ.

See Page 219 for further details.

PRODUCT CODE EXAMPLE

LTABHEX63190ZC
LTABHEX35130ZN

PRODUCT DESCRIPTION EXAMPLE

6.3 x 19.0 Hexagon Type C DIN 7976 Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 13.0 Hexagon Type C DIN 7976 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com

17

SELF-TAPPING
SCREWS

SELF-DRILLING
SCREWS

TAP-FIX® THREAD
ROLLING SCREWS

ROLLED THREAD
MACHINE SCREWS

TAMPER PROOF
SECURITY SCREWS

HAMMER DRIVE
SCREWS

SCREWS FOR
PLASTICS

MICRO DIAMETER
SCREWS

K-SERIES®
SETZMUTTERN

RIVET BUSHES &
SELF-CLINCHING
FASTENERS

CD WELD STUDS

BRASS INSERTS
FOR PLASTICS

TECHNICAL DATA



LANCASTER

DIN7981


Self-Tapping Screws

Cross Recess (Z) Pan

Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant

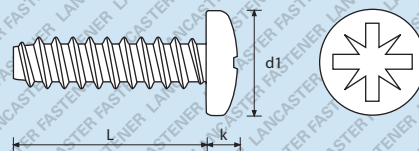

All images are copyright protected

Further technical data is available on pages 186 -188

TYPE F blunt

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
3.0	125,000 1,000 0.17								1/8
4.5	100,000 1,000 0.19	54,000 1,000 0.38	30,000 1,000 0.62						3/16
6.5	80,000 1,000 0.23	40,000 1,000 0.46	28,000 1,000 0.75	20,000 1,000 0.94	15,000 1,000 1.17	10,000 1,000 1.85			1/4
8	70,000 1,000 0.25	40,000 1,000 0.53	26,000 1,000 0.81		15,000 1,000 1.31	10,000 1,000 1.94			5/16
9.5	60,000 1,000 0.30	32,000 1,000 0.54	25,000 1,000 0.88	17,000 1,000 1.11	13,000 1,000 1.42	8,500 1,000 2.06			3/8
13	55,000 1,000 0.36	30,000 1,000 0.60	20,000 1,000 1.03	14,000 1,000 1.32	12,000 1,000 1.61	7,500 1,000 2.30	6,000 1,000 3.20	4,000 500 4.76	1/2
16		25,000 1,000 0.74	15,000 1,000 1.20	12,000 1,000 1.52	11,000 1,000 1.83	7,000 1,000 2.50	5,500 1,000 3.50		5/8
19		20,000 1,000 0.83	13,000 1,000 1.34	10,000 1,000 1.68	9,000 1,000 2.01	7,000 1,000 2.86	5,000 500 3.68		3/4
22			10,000 1,000 1.49			6,000 500 3.12			7/8
25		12,000 1,000 1.06	10,000 1,000 1.65		7,500 1,000 2.49	5,000 500 3.40	4,000 500 4.46		1
32		12,000 1,000 1.28	8,000 1,000 1.95		6,000 500 2.95	4,000 500 3.95			1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4

Zinc Plated (CR3) - preferred and available from stock.
 Black (CR3) - non preferred and may be subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) preferred and available from stock.

See Page 219 for further detail.

PRODUCT CODE EXAMPLE

LTBZPAN22095ZC

LTBZPAN42065ZN

PRODUCT DESCRIPTION EXAMPLE

2.2 x 9.5 Cross Recess (Z) Pan Type F DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)

4.2 x 6.5 Cross Recess (Z) Pan Type F DIN 7981 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
 © 2018, Lancaster Fastener Co Ltd.

18

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com



LANCASTER

DIN 7982

Self-Tapping Screws

Cross Recess (Z) Countersunk


Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant



All images are copyright protected

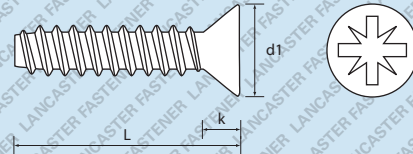

Further technical data is available on pages 186 -188

TYPE F blunt

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
4.5	150,000 1,000 0.12								3/16
6.5	120,000 1,000 0.15	64,000 1,000 0.31	38,000 1,000 0.55						1/4
8	100,000 1,000 0.20	45,000 1,000 0.36	35,000 1,000 0.57						5/16
9.5	80,000 1,000 0.21	40,000 1,000 0.41	30,000 1,000 0.63	25,000 1,000 1.23	16,000 1,000 1.00				3/8
13	72,000 1,000 0.27	38,000 1,000 0.55	24,000 1,000 0.76		16,000 1,000 1.20	11,000 1,000 1.73			1/2
16		30,000 1,000 0.64	22,000 1,000 0.94		11,000 1,000 1.41	9,000 1,000 2.03			5/8
19			18,000 1,000 1.15		10,000 1,000 1.65	8,500 1,000 2.20			3/4
22									7/8
25			14,000 1,000 1.41		7,000 1,000 2.08	6,000 1,000 2.77			1
32					6,000 500 2.48			2,500 500 6.17	1 1/4
38								2,300 250 7.40	1 1/2
45							3,000 250 6.11	1,800 250 8.40	1 3/4
50								1,500 250 9.11	2
57								1,500 200 10.56	2 1/4
63								1,000 150 11.43	2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ (2.9mm and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock. See Page 219 for further detail.

PRODUCT CODE EXAMPLE

LTBZCSK35190ZC
LTBZCSK29130ZN

PRODUCT DESCRIPTION EXAMPLE

3.5 x 19.0 Cross Recess (Z) Countersunk Type F DIN 7982 Self-Tapping Screw Steel / Zinc Plated (CR3)
2.9 x 13.0 Cross Recess (Z) Countersunk Type F DIN 7982 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

t: +44 (0) 1524 389 232 f: +44 (0) 1524 66367 enquiries@lancasterfastener.co.uk www.lancasterfastener.com

19

SELF-TAPPING
SCREWS

SELF-DRILLING
SCREWS

TAP-FIX® THREAD
ROLLING SCREWS

ROLLED THREAD
MACHINE SCREWS

TAMPER PROOF
SECURITY SCREWS

HAMMER DRIVE
SCREWS

SCREWS FOR
PLASTICS

MICRO DIAMETER
SCREWS

K-SERIES®
SETZMUTTERN

RIVET BUSHES &
SELF-CLINCHING
FASTENERS

CD WELD STUDS

BRASS INSERTS
FOR PLASTICS

TECHNICAL DATA



LANCASTER

BS 4174


Self-Tapping Screws

Cross Recess (Z) Flange

Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant

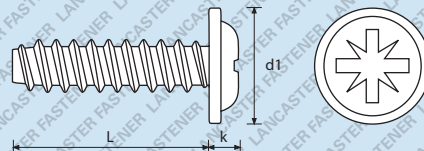

All images are copyright protected

Further technical data is available on pages 186 -188

TYPE F blunt

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	6.53	8.15	8.90	9.75	11.38	13.00	14.55	d1 - max
k - max	-	1.60	1.88	2.00	2.36	2.90	3.15	3.68	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins	
4.5								3/16	
6.5	40,000 1,000 0.39		30,000 1,000 0.69		20,000 1,000 1.05			1/4	
8			28,000 1,000 0.70		17,000 1,000 1.20			5/16	
9.5	30,000 1,000 0.49		22,000 1,000 0.76		16,000 1,000 1.30		10,000 1,000 1.78	3/8	
13					12,500 1,000 1.55		8,500 1,000 2.25	1/2	
16					11,500 1,000 1.66		8,500 1,000 2.29	5/8	
19					10,000 1,000 1.92			3/4	
22								7/8	
25								1	
32								1 1/4	
38								1 1/2	
45								1 3/4	
50								2	
57								2 1/4	
63								2 1/2	
70								2 3/4	
75								3	

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ.

Zinc Plated (CR3) & Black (CR3)
preferred and available from stock.

See Page 219
for further detail.

PRODUCT CODE EXAMPLE

LTBZFLN42160ZC
LTBZFLN35080ZN

PRODUCT DESCRIPTION EXAMPLE

4.2 x 16.0 Cross Recess (Z) Flange Type F BS4174 Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 8.0 Cross Recess (Z) Flange Type F BS4174 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

20

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com



LANCASTER

DIN 7981


Self-Tapping Screws

T-Drive® (6-Lobe) Pan

Steel / Zinc Plated (CR3)

Steel / Black (CR3)

RoHS 2 Compliant



All images are copyright protected

Further technical data is available on pages 186 -188

TYPE F blunt

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T8	T10	T15	T15	T20	T25	T25	T30	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5		40,000 1,000 0.46	28,000 1,000 0.78		15,000 1,000 1.12				1/4
8									5/16
9.5		32,000 1,000 0.55	25,000 1,000 0.91		13,000 1,000 1.33	8,500 1,000 2.12			3/8
13			20,000 1,000 1.08		12,000 1,000 1.88	7,500 1,000 1.64	6,000 1,000 3.19		1/2
16					11,000 1,000 2.43	7,000 1,000 2.72			5/8
19									3/4
22									7/8
25									1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ.

See Page 219 for further details.

PRODUCT CODE EXAMPLE

LTBTXPAN55130ZC
LTBTXPAN48160ZN

PRODUCT DESCRIPTION EXAMPLE

5.5 x 13.0 T-Drive® Pan Type F DIN 7981 Self-Tapping Screw Steel / Zinc Plated (CR3)
4.8 x 16.0 T-Drive® Pan Type F DIN 7981 Self-Tapping Screw Steel / Black (CR3)

T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd.
E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com

21

TECHNICAL DATA

BRASS INSERTS FOR PLASTICS

CD WELD STUDS

RIVET BUSHES & SELF-CLINCHING FASTENERS

K-SERIES® SETZMUTTERN

MICRO DIAMETER SCREWS

SCREWS FOR PLASTICS

HAMMER DRIVE SCREWS

TAMPER PROOF SECURITY SCREWS

ROLLED THREAD MACHINE SCREWS

TAP-FIX® THREAD ROLLING SCREWS

SELF-DRILLING SCREWS

SELF-TAPPING SCREWS



LANCASTER


DIN7976

Self-Tapping Screws

Hexagon

Steel / Zinc Plated (CR3)
Steel / Black (CR3)

RoHS 2 Compliant

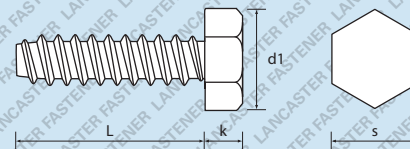

All images are copyright protected

Further technical data is available on pages 186 -188

TYPE F blunt

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	-	-	-	-	-	-	d1 - max
k - nom	1.30	1.50	2.30	2.30	2.80	3.00	4.00	4.80	k - nom
s - A/F max	3.20	5.00	5.50	7.00	7.00	8.00	8.00	10.00	s - A/F max
Recess	-	-	-	-	-	-	-	-	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins	
4.5									3/16
6.5									1/4
8									5/16
9.5						9,000 1,000 1.87			3/8
13						6,000 1,000 2.02	7,000 1,000 2.72	4,000 500 4.25	1/2
16								4,000 500 4.77	5/8
19							4,000 1,000 3.48		3/4
22									7/8
25									1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Zinc Plated (CR3) - preferred and available from stock.
Black (CR3) - non preferred and may be subject to a lead time and MOQ.

See Page 219
for further detail.

PRODUCT CODE EXAMPLE

LTBHEX63160ZC
LTBHEX48130ZN

PRODUCT DESCRIPTION EXAMPLE

6.3 x 16.0 Hexagon Type F DIN 7976 Self-Tapping Screw Steel / Zinc Plated (CR3)
4.8 x 13.0 Hexagon Type F DIN 7976 Self-Tapping Screw Steel / Black (CR3)

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

22

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com




LANCASTER

DIN7981

Self-Tapping Screws

Cross Recess (Z) Pan
A2 - Stainless Steel

RoHS 2 Compliant

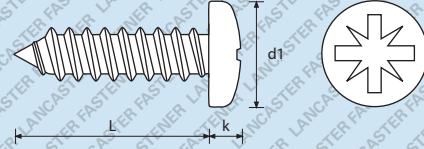

All images are copyright protected

TYPE C pointed

Further technical data is available on pages 186 -188

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5			24,000 1,000 0.87			10,000 1,000 1.78			3/8
13			18,000 1,000 1.05		13,000 1,000 1.53				1/2
16									5/8
19			13,000 1,000 1.31		10,000 1,000 1.94				3/4
22									7/8
25					8,000 1,000 2.36	5,000 500 3.38			1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE

SSLTABZPAN35190A2

PRODUCT DESCRIPTION EXAMPLE

3.5 x 19.0 Cross Recess (Z) Pan Type C DIN 7981 Self-Tapping Screw A2 - Stainless Steel



LANCASTER


DIN 7982

Cross Recess (Z) Countersunk
A2 - Stainless Steel

RoHS 2 Compliant



All images are copyright protected



Further technical data is available on pages 186 -188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000							L- Length ins	
4.5									3/16
6.5									1/4
8									5/16
9.5			28,000 1,000 0.65						3/8
13									1/2
16					12,000 1,000 1.29				5/8
19		16,000 1,000 1.00			12,000 1,000 1.48				3/4
22									7/8
25					9,000 1,000 1.87				1
32					5,000 500 2.38				1 1/4
38					4,000 500 2.83				1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE

SSLTABZCSK35190A2

PRODUCT DESCRIPTION EXAMPLE

3.5 x 19.0 Cross Recess (Z) Countersunk Type C DIN 7982 Self-Tapping Screw A2 - Stainless Steel

E. & O. E.

© 2018, Lancaster Fastener Co Ltd.

24

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com



LANCASTER


BS 4174

Self-Tapping Screws

Cross Recess (Z) Flange

A2 - Stainless Steel

RoHS 2 Compliant

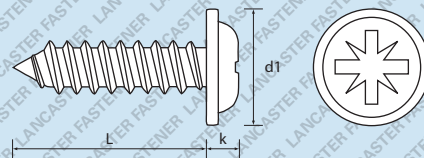

All images are copyright protected

Further technical data is available on pages 186 -188

TYPE C pointed

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	6.53	8.15	8.90	9.75	11.38	13.00	14.55	d1 - max
k - max	-	1.60	1.88	2.00	2.36	2.90	3.15	3.68	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L- Length mm	Bulk Carton Quantity Small Box Quantity Weight (KG) per 1,000								L- Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5									3/8
13			20,000 1,000 1.00			12,000 1,000 1.38			1/2
16									5/8
19						11,000 1,000 1.78			3/4
22									7/8
25						7,000 1,000 2.24			1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE

SSLTABZFLN42130A2

PRODUCT DESCRIPTION EXAMPLE

4.2 x 13.0 Cross Recess (Z) Flange Type C BS4174 Self-Tapping Screw A2 - Stainless Steel

E. & O. E.
© 2018, Lancaster Fastener Co Ltd.

t: +44 (0) 1524 389 232

f: +44 (0) 1524 66367

enquiries@lancasterfastener.co.uk

www.lancasterfastener.com

25

TECHNICAL DATA

BRASS INSERTS
FOR PLASTICS

CD WELD STUDS

RIVET BUSHES &
SELF-CLINCHING
FASTENERS

K-SERIES®
SETZMUTTERN

MICRO DIAMETER
SCREWS

SCREWS FOR
PLASTICS

HAMMER DRIVE
SCREWS

TAMPER PROOF
SECURITY SCREWS

ROLLED THREAD
MACHINE SCREWS

TAP-FIX® THREAD
ROLLING SCREWS

SELF-DRILLING
SCREWS

SELF-TAPPING
SCREWS