


T-Drive® (6-Lobe) Countersunk DIN 965

Steel / Zinc Plated (CR3) & Steel / Black (CR3)



Thread	M1.6	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Thread
Dia. Gauge	-	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	3.00	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	0.96	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	-	s - A/F
Recess	T5	T6	T8	T10	T15	T20	T25	T30	T40	Recess

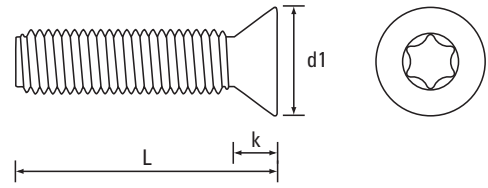

Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-msmtdrcskzc>

L - Length mm											L - Length mm
3	●										3
4	●	●	●	● ●							4
5	●	●	●	● ●		●					5
6		●	●	● ●		● ●	●				6
8		●	●	● ●		● ●	●				8
10			●	● ●		● ●	● ●	●			10
12			●	● ●		● ●	● ●	● ●	●		12
14											14
16			●	● ●		● ●	● ●	● ●	●		16
18											18
20			●	● ●		● ●	● ●	● ●	●		20
22											22
25				● ●		●	● ●	● ●			25
30				●		●	● ●	● ●			30
35						●	●	●			35
40						●	●	●			40
45							●	●			45
50				●		●	●				50
55											55
60											60
70											70
80											80
90											90
100											100

● Steel / Zinc Plated (CR3) - preferred and available from stock.

● Steel / Black (CR3) - preferred and available from stock.

**PRODUCT CODE EXAMPLE**

MSMTDRCSK25005ZC  
 MSMTDRCSK40012ZN

**PRODUCT DESCRIPTION EXAMPLE**

M2.5 x 5 T-Drive® (6-Lobe) Countersunk DIN 965 Machine Screw Grade 4.8 Steel / Zinc Plated (CR3)  
 M4 x 12 T-Drive® (6-Lobe) Countersunk DIN 965 Machine Screw Grade 4.8 Steel / Black (CR3)

Screws for Plastics  
 ISO & DIN 7500 Tap-Fix® Screws  
 Machine Screws  
 Self-Tapping Screws  
 Self-Drilling Screws  
 Micro Diameter Screws  
 Hammer Drive Screws  
 K-Series® Setzmuttern  
 Rivet Bushes  
 Self-Clinching Fasteners  
 CD Weld Studs  
 Brass Inserts for Plastics