


Self-Tapping Screws

Screws for Sheet Metal Applications

T-Drive® (6-Lobe) Pan DIN 7981 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

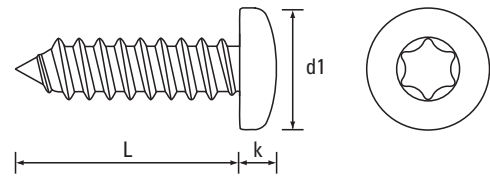

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T8	T10	T15	T15	T20	T25	T25	T30	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabtxpanzc								L - Length ins
4.5									3/16
6.5	●	●	●		● ●				1/4
8		●	●						5/16
9.5		●	● ●	●	● ●	●			3/8
13		●	● ●	●	● ●	● ●	●	●	1/2
16		●	● ●	●	● ●	● ●	●	●	5/8
19		●	● ●	●	● ●	● ●	● ●	●	3/4
22			● ●	●	●				7/8
25		●	● ●	●	● ●	● ●	● ●	●	1
32		●	●	●	● ●	●		●	1 1/4
38			●	●	● ●	●		●	1 1/2
45						●			1 3/4
50					●	●			2
57									2 1/4
63									2 1/2
70									2 3/4
75									3



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTABTXPAN48190ZC
LTABTXPAN35160ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 19.0 T-Drive® (6-Lobe) Pan DIN 7981 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 16.0 T-Drive® (6-Lobe) Pan DIN 7981 Type C Self-Tapping Screw Steel / Black (CR3)