



LANCASTER


DIN 965

T-Drive® (6-Lobe) Countersunk Steel / Zinc Plated (CR3) & Steel / Black (CR3)

Micro Diameter

MACHINE SCREWS - GRADE 4.8

RoHS 2 Compliant

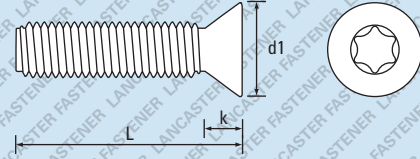

Also available in A2 Stainless Steel - See page 203

Further technical data is available on page 253

| Thread       | M1.6  | M2                     | M2.5                   | - | - | - | - | - | - | Thread       |
|--------------|---|------------------------|------------------------|---|---|---|---|---|---|--------------|
| Dia. Gauge   | -   | -                      | -                      | - | - | - | - | - | - | Dia. Gauge   |
| d1 - max     | 3.00  | 3.80                   | 4.70                   | - | - | - | - | - | - | d1 - max     |
| k - ref      | 0.96  | 1.20                   | 1.50                   | - | - | - | - | - | - | k - ref      |
| s - A/F      | -   | -                      | -                      | - | - | - | - | - | - | s - A/F      |
| Recess       | T5  | T6                     | T8                     | - | - | - | - | - | - | Recess       |
| L- Length mm | Bulk Carton Quantity   Small Box Quantity   Weight (KG) per 1,000 |                        |                        |   |   |   |   |   |   | L- Length mm |
| 3            | 400,000   1,000   0.21  |                        |                        |   |   |   |   |   |   | 3            |
| 4            | 333,000   1,000   0.22  | 200,000   1,000   0.22 | 100,000   1,000   0.28 |   |   |   |   |   |   | 4            |
| 5            | 286,000   1,000   0.23  | 160,000   1,000   0.24 | 100,000   1,000   0.30 |   |   |   |   |   |   | 5            |
| 6            | 286,000   1,000   0.24  | 133,000   1,000   0.25 | 90,000   1,000   0.30  |   |   |   |   |   |   | 6            |
| 8            |   | 83,000   1,000   0.26  | 67,000   1,000   0.33  |   |   |   |   |   |   | 8            |
| 10           |   |                        | 56,000   1,000   0.34  |   |   |   |   |   |   | 10           |
| 12           |   |                        | 48,000   1,000   0.40  |   |   |   |   |   |   | 12           |
| 16           |   |                        | 35,000   1,000   0.46  |   |   |   |   |   |   | 16           |
| 20           |   |                        | 25,000   1,000   0.52  |   |   |   |   |   |   | 20           |
| 25           |   |                        |                        |   |   |   |   |   |   | 25           |
| 30           |   |                        |                        |   |   |   |   |   |   | 30           |
| 35           |   |                        |                        |   |   |   |   |   |   | 35           |
| 40           |   |                        |                        |   |   |   |   |   |   | 40           |
| 45           |   |                        |                        |   |   |   |   |   |   | 45           |
| 50           |   |                        |                        |   |   |   |   |   |   | 50           |
| 55           |   |                        |                        |   |   |   |   |   |   | 55           |
| 60           |   |                        |                        |   |   |   |   |   |   | 60           |
| 70           |   |                        |                        |   |   |   |   |   |   | 70           |
| 80           |   |                        |                        |   |   |   |   |   |   | 80           |
| 90           |   |                        |                        |   |   |   |   |   |   | 90           |
| 100          |   |                        |                        |   |   |   |   |   |   | 100          |

Zinc Plated (CR3) - preferred and available from stock. Black (CR3) - non preferred and subject to a lead time and MOQ (M2.5 and above).

Zinc Plated (CR3) & Black (CR3) - preferred and available from stock.

See page 267 for further detail.

| PRODUCT CODE EXAMPLE | PRODUCT DESCRIPTION EXAMPLE   |
|----------------------|---|
| MSMTDRCSK25005ZC     | M2.5 x 5 T-Drive® Countersunk DIN 965 Micro Screw Grade 4.8 Steel / Zinc Plated (CR3) |
| MSMTDRCSK25008ZN     | M2.5 x 8 T-Drive® Countersunk DIN 965 Micro Screw Grade 4.8 Steel / Black (CR3)       |

T-Drive® is a registered trade mark of Lancaster Fastener Co Ltd. 180° & 360° NYLOK® Blue Patching service available on M2 dia. and above. E. & O. E. See page 267 for further detail. © 2021, Lancaster Fastener Co Ltd. All images are copyright protected. NYLOK® is a registered trade mark of NYLOK®.

Carbon Steel Product Ranges

Stainless Steel Product Ranges

Brass Product Ranges

Technical Data